




REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	06-11-02	

Specification


Rated Voltage: 300V AC/DC
Rated Current: 5A AC/DC
Contact Resistance: 30mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 1500V AC
Operating Temperature: -25C~+80C
Plastic Material: PA66+30GF,UL94V-2(白)
Contact Material: Brass
Finish: TIN Plated

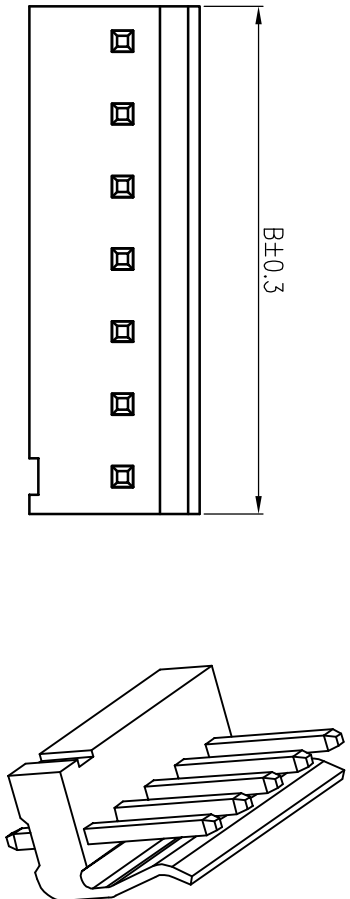

pin	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.8	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.6	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.63	71.28
19	71.28	75.24
20	75.24	79.20

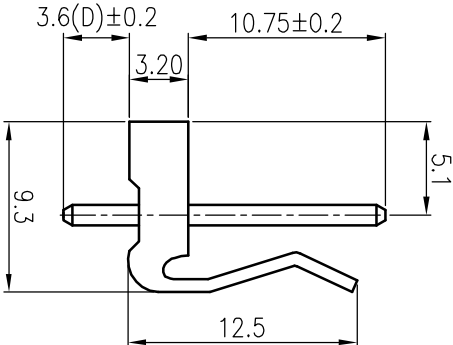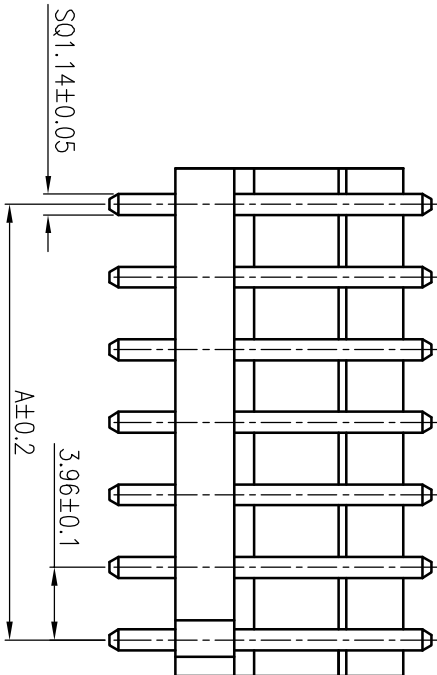

Ordering information

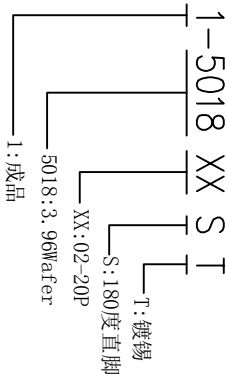

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5018XXA	396mmWafer塑膠1XNP,材質PA66	1PCS
2	5-Q114x175S-T	1.14四方鍍錫針長17.5	NPCS

DISMT 東莞得升機械電子有限公司
DISMT MECHANICAL ELECTRONIC CO.,LTD

DRAWN BY: 杨熊
DATE: 11-2-06
TITLE: 成品规格圖
PART NAME: 3.96mm Wafer
PART NO. 1-5018XXST

CHECKED BY: 何智权
DATE: 11-2-06
MOLD NO.
DRAW NO. A-1-5018XXST

APPROVED BY: 陈宗渊
DATE: 11-2-06
SHEET 1 OF 1

P.C.B LAYOUT

