



REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				12-9-6	

Specification



Rated Voltage: 50V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 500Megohms min
Dielectric Withstanding: 500V AC
Material
Plastic Material: PA9T UL94V-0
Pin: Brass
Solder Tabs: Bright Tin
Bright Tin

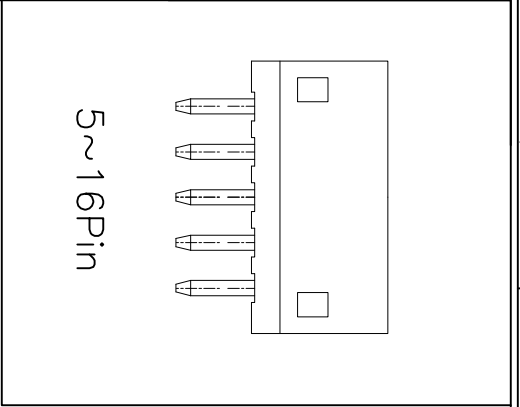

5~16Pin

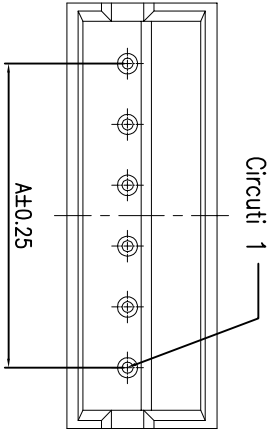


B±0.40

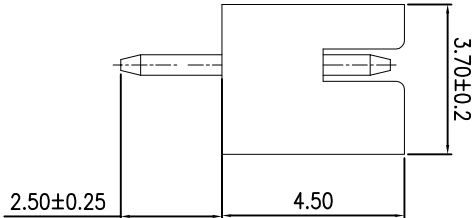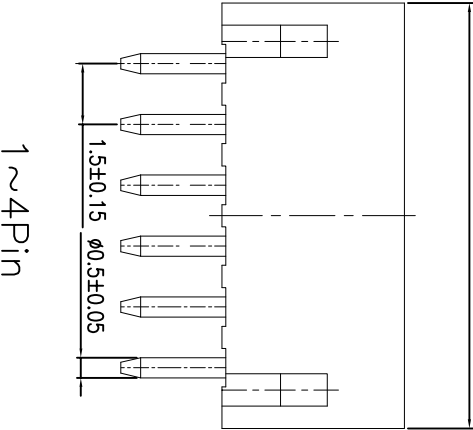

DSX - 5 1501 S - XXP - E N I T
① Packing code: O=Bog ;B=BOX ;I=Tube ; R=Reel ; C=Reel+cap ; P=Tray
② S=Wafer
③ Series NO
④ S=Vertical ; R=Right angle
⑤ NO. of circuits
⑥ Material: E=PA9T
⑦ Color : N=Notul
⑧ Plating code:I=Bright Tin (PIN)
⑨ Plating code:I=Bright Tin (Solder Tabs)

Poles	DIM.A	DIM.B
2P	1.5	4.5
3P	3.0	6.0
4P	4.5	7.5
5P	6.0	9.0
6P	7.5	10.5
7P	9.0	12.0
8P	10.5	13.5
9P	12.0	15.0
10P	13.5	16.5
11P	15.0	18.0
12P	16.5	19.5
13P	18.0	21.0
14P	19.5	22.5
15P	21.0	24.0
16P	22.5	25.5



P.C.B. LAYOUT

TOLERANCE UNSPECIFIED: X. ±0.50 X.X ±0.25 X.XX ±0.15 X.XXX ±0.05 X.X' ±2' X.X' ±1'		DRAWN BY : 江春龙		DATE : 2020-04-23		TITLE: 成品規格圖	
PROJECTION: 		CHECKED BY: 李璇		DATE : 2020-04-23		PART NO. 51501S	
UNIT: mm [Inch]		APPROVED BY: 邱锦荣		DATE : 2020-04-23		MOLD NO. /	
SIZE: A4						DRAW NO. 1-WF142	
						SHEET 1 OF 1	

DISNT 東莞得升電子機械有限公司
DISNT MECHANICAL ELECTRONIC CO.,LTD