
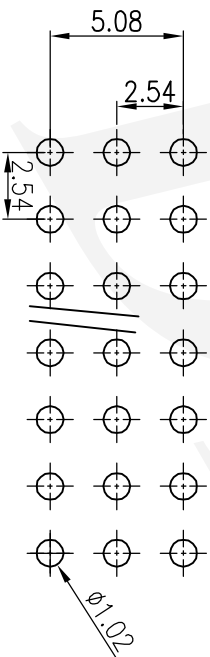
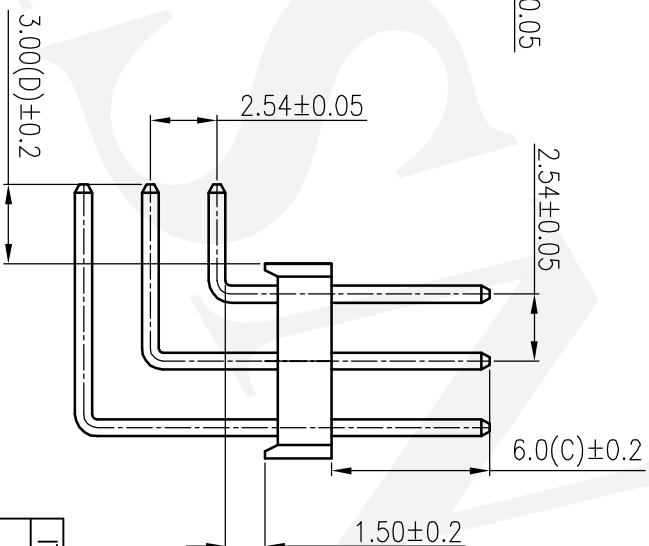


	pin	A	B
A	3x2	2.54	5.08
	3x3	5.08	7.62
	3x4	7.62	10.16
	3x5	10.16	12.70
	3x6	12.70	15.24
B	3x7	15.24	17.78
	3x8	17.78	20.32
	3x9	20.32	22.86
	3x10	22.86	25.40
	3x11	25.40	27.94
C	3x12	27.94	30.48
	3x13	30.48	33.02
	3x14	33.02	35.56
	3x15	35.56	38.10
	3x16	38.10	40.64
	3x17	40.64	43.18
	3x18	43.18	45.72
	3x19	45.72	48.26
	3x20	48.26	50.80
	3x21	50.80	53.34
	3x22	53.34	55.88
	3x23	55.88	58.42
	3x24	58.42	60.96
	3x25	60.96	63.50
	3x26	63.50	66.04
	3x27	66.04	68.58
	3x28	68.58	71.12
	3x29	71.12	73.66
	3x30	73.66	76.20
	3x31	76.20	78.74
	3x32	78.74	81.28
	3x33	81.28	83.82
	3x34	83.82	86.36
	3x35	86.36	88.90
	3x36	88.90	91.44
	3x37	91.44	93.98
	3x38	93.98	96.52
	3x39	96.52	99.06
	3x40	99.06	101.6

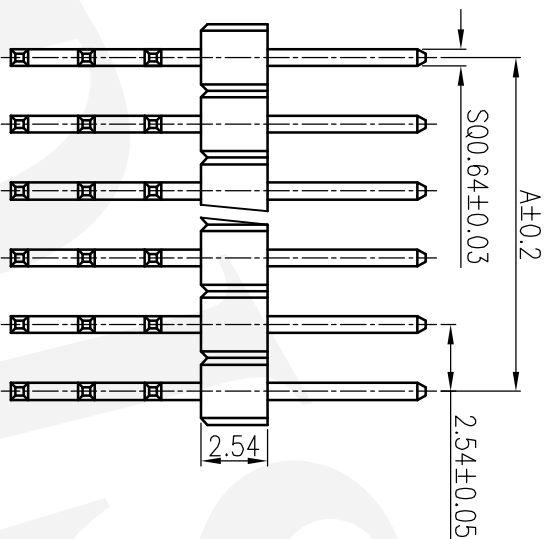

P.C.B LAYOUT

DISNT
得升電子股份有限公司
DISNT ELECTRONIC CO., LTD

1-112 XX R G-C 060030B

B:PA6T

G:鍍金

R:90度彎腳

XX:03-120P

2:PH2.54

112:三排單腳

1:成品

Ordering information

Rated Voltage:	500V AC/DC
Rated Current:	3A AC/DC
Contact Resistance:	20mohms max
Insulator Resistance:	5000Megohms/Min.
Dielectric Withstanding:	500V AC
Operating Temperature:	-40°C~+85°C
Plastic Material:	PA6T/Black
Contact Material:	Brass
Finish:	Gold Flash Plated