

REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				12-9-6	





Specification

Rated Voltage: 250V AC/DC
 Rated Current: 4A AC/DC
 Contact Resistance: 10mohms max
 Insulator Resistance: 1000Megohms min
 Dielectric Withstanding: 1000V AC
 Operating Temperature: -25°C~+85°C
 Material
 Plastic Material: PA66 UL94V-2
 Pin: Brass
 Bright Tin

DSX - 5 2541 S A - XXP - A V T 330
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩


- ① Packing code: O=Bag; B=BOX; T=Tube; R=Reel; C=Reel+cap; P=Tray
- ② 5=Wafer
- ③ Series NO
- ④ S=Vertical ; R=Right angle
- ⑤ Blank=Long back ; A=Short back ; B=Half back
- ⑥ NO.of circuits
- ⑦ Material: A=PA66 ;
- ⑧ Color : V=Vermillion
- ⑨ Plating code:T=Bright Tin (PIN)
- ⑩ Exposed D :340=3.4mm

Circuit 1

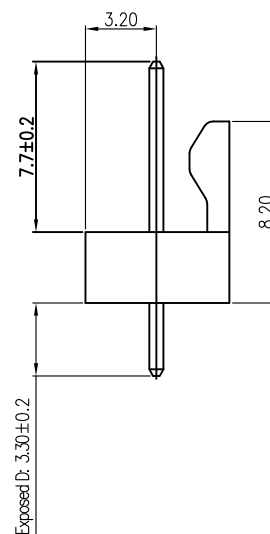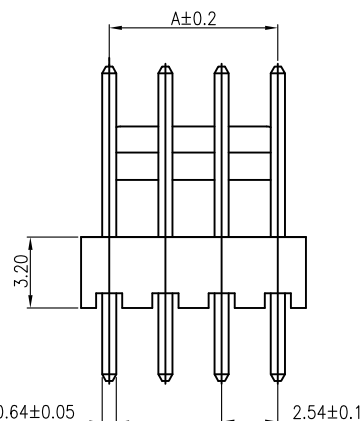

Exposed D: 3.30±0.2

PIN	A	B
02	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80



P.C.B LAYOUT

TOLERANCE UNSPECIFIED:

X. ±0.50
 X.X ±0.25
 X.XX ±0.15
 X.XXX ±0.05
 X.* ±2°
 X.X° ±1°



東莞得升電子機械有限公司
 DISNT MECHANICAL ELECTRONIC CO.,LTD

DRAWN BY :

江春龙

DATE :

2020-12-07


TITLE:

成品規格圖

PART NAME:

2.54mm DIP 180° Shotr back Wafer

PROJECTION:



CHECKED BY:

李院

DATE :

2020-12-07

PART NO.

52541SA

Q'TY

/

UNIT: mm [inch]

APPROVED BY:

邱锦荣

DATE :

2020-12-07

DRAW NO.

1-WF026

SHEET

1 OF 1