





REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	07-04-02	
B	ECN07062901	△X2	圖面錯誤	07-06-29	肖夢昆

Specification


Rated Voltage: 350V AC/DC
Rated Current: 7A AC/DC
Contact Resistance: 30mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 1500V AC
Operating Temperature: -25℃~+80℃
Plastic Material: PA66+30%GF,UL94V-2,白色
Contact Material: Brass
Finish: Tin Plated

Ordering information

1-5016 XX S T-A
A: 白色
T: 鍍錫
S: 180°直脚
XX: 04-56P
5016: 4.2MINI FIT
1: 成品

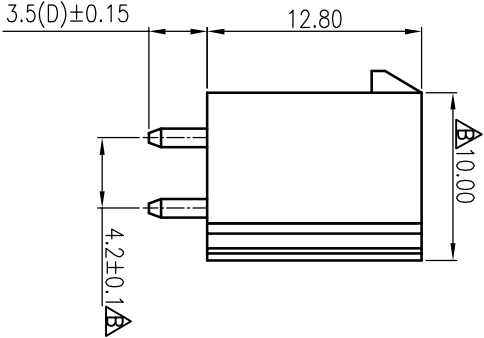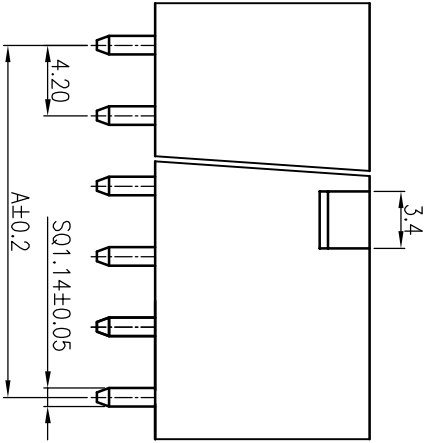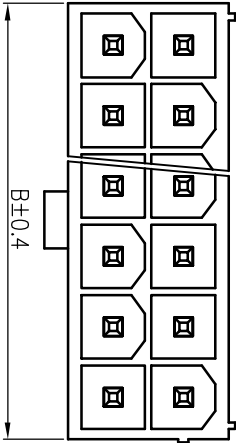

pin /row	A	B
2x2	4.20	10.00
2x3	8.40	14.20
2x4	12.60	18.40
2x5	16.80	22.60
2x6	21.00	26.80
2x7	25.20	31.00
2x8	29.40	35.20
2x9	33.60	39.40
2x10	37.80	43.60
2x11	42.00	47.80
2x12	46.20	52.00
2x13	50.40	56.20
2x14	54.60	60.40
2x15	58.80	64.60
2x16	63.00	68.80
2x17	67.20	73.00
2x18	71.40	77.20
2x19	75.60	81.40
2x20	79.80	85.60
2x21	84.00	89.80
2x22	88.20	94.00
2x23	92.40	98.20
2x24	96.60	102.40
2x25	100.80	106.60
2x26	105.00	110.80
2x27	109.20	115.00
2x28	113.40	119.20

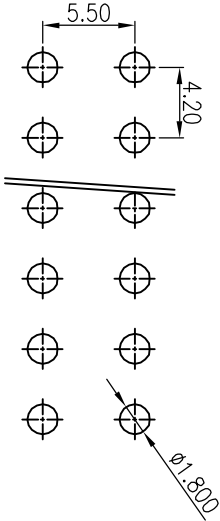

P.C.B LAYOUT

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5016XX-A	4.2mm MINI FIT塑膠2x8,白色	1PCS
2	5-Q114x127S-T	1.14四方鍍銅針,180°長12.7	NPCS

TOLERANCE UNSPECIFIED:	
X	±0.50
XX	±0.25
XXX	±0.10
XXXX	±0.05
X"	±2°
X'X	±1°

PROJECTION:	CHECKED BY: 何智权	DATE: 6-29-07	PART NO.	1-5016XXST-A
	DRAWN BY: 杨熊	DATE: 6-29-07	MOLD NO.	
UNIT: mm [inch]	APPROVED BY: 陈宗渊	DATE: 6-29-07	DRAW NO.	A-1-5016XXST-A
SCALE: 1:1	SIZE: A4		SHEET	1 OF 1

東莞得升電子機械有限公司
DISNT MECHANICAL ELECTRONIC CO.,LTD