
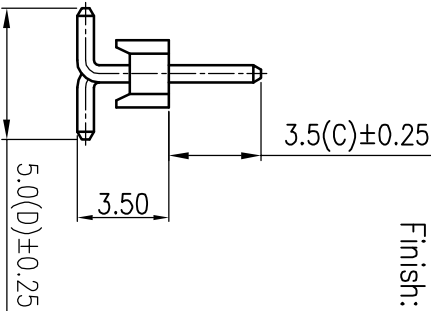
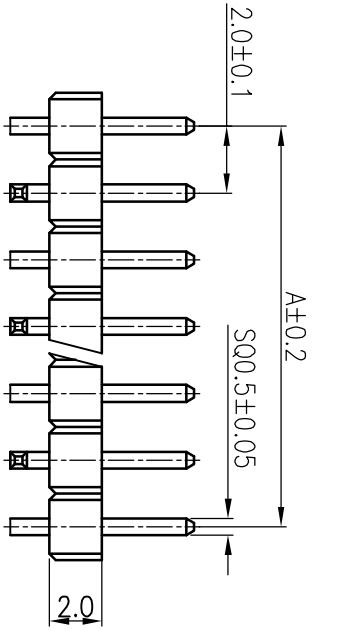
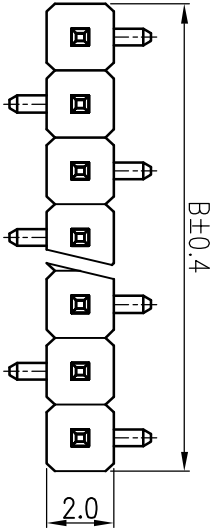


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-04-03	


Specification

Rated Voltage: 125V AC/DC
Rated Current: 2A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -40°C~+105°C
Plastic Material: PA6T+30%GF, UL94V-0,Black
Contact Material: Brass
Finish: Gold Flash Plated

Ordering information

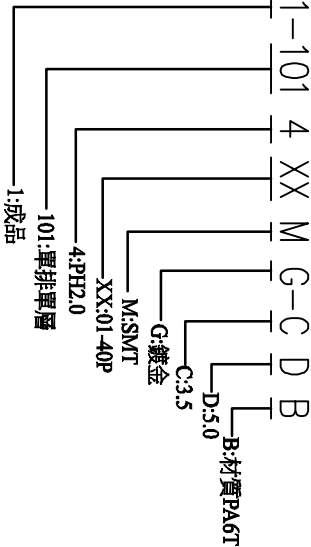

pin	A	B
2	2.00	4.00
3	4.00	6.00
4	6.00	8.00
5	8.00	10.00
6	10.00	12.00
7	12.00	14.00
8	14.00	16.00
9	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00

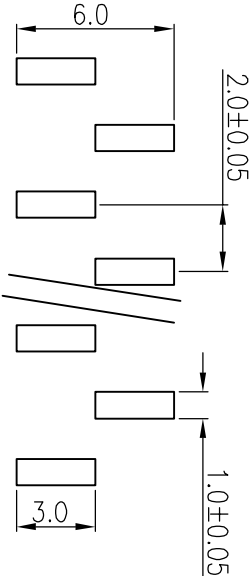

P.C.B LAYOUT

TOLERANCE UNSPECIFIED:		DRAWN BY: 杨熊		DATE: 4-3-08		TITLE: 成品规格图	
X	±0.50	CHECKED BY: 何智权		DATE: 4-3-08		PART NAME: 2.0mm Pin Header	
XX	±0.25	APPROVED BY: 陈宗渊		DATE: 4-3-08		PART NO. 1-1014XXMG-035050B	
XXX	±0.10	SCALE: 1:1		SIZE: A4		MOLD NO.	
XXX	±0.05	UNIT: mm [inch]		SHEET 1 OF 1		DRAW NO. A-1-1014XXMG-035050B	
X'	±2°	PROJECTION:		PROJECT NO:		PROJECT NO:	
XX'	±1°	PROJECT NO:		PROJECT NO:		PROJECT NO:	