
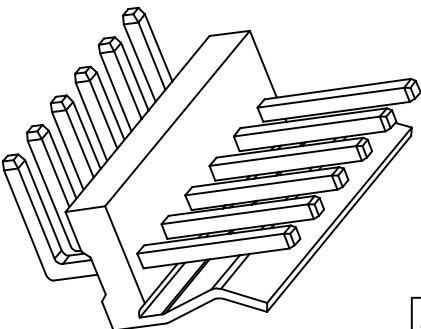


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	07-01-12	




pin	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.8	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.6	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.63	71.28
19	71.28	75.24
20	75.24	79.20

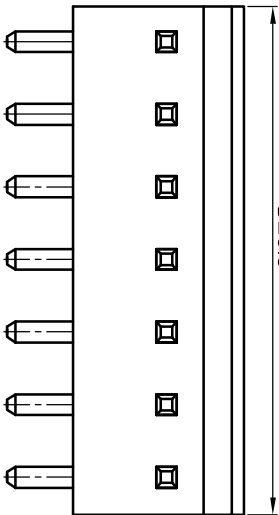


Specification

Rated Voltage: 300V AC/DC
Rated Current: 5A AC/DC
Contact Resistance: 30mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 1500V AC
Operating Temperature: -25℃~+80℃
Plastic Material: PA66+30%GF, UL94V-2 (白)
Contact Material: Brass
Finish: TIN Plated

Ordering information

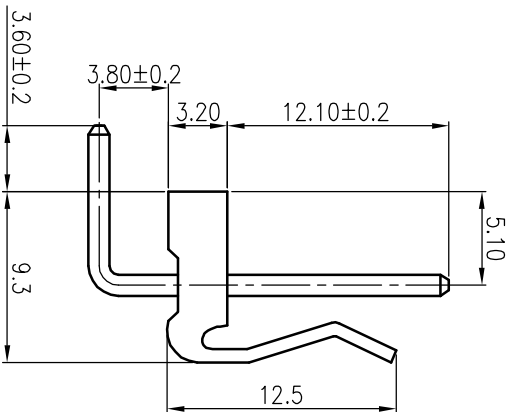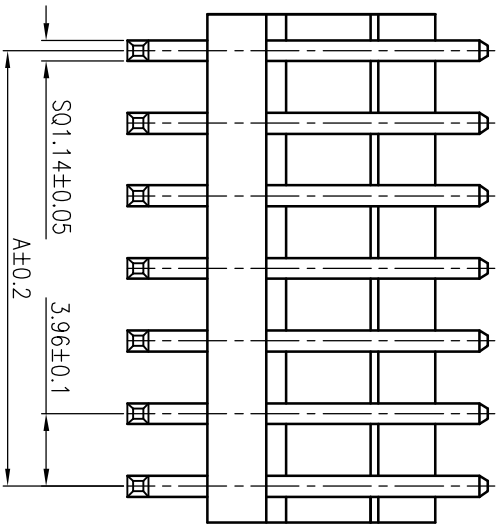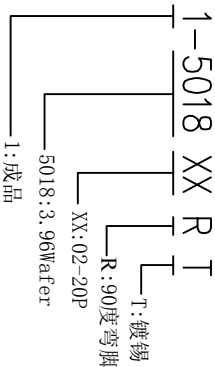

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5018XXA	3.96mm Wafer 塑膠 1XNP, 材質 PA66	1PCS
2	5-Q114x270R-T	1.14四方鍍錫針, 90度長27.0	NPCS



P.C.B LAYOUT

TOLERANCE UNSPECIFIED:			
X	±0.50	 東莞得升機械電子有限公司 DONG MECHANICAL ELECTRONIC CO.,LTD	
X.X	±0.25		
X.XX	±0.10		
X.XXX	±0.05		
X'	±2°		
X'X'	±1°		
PROJECTION:			
CHECKED BY: 何智权			
DATE: 11-8-6			
PART NAME: 成品規格圖			
DRAINED BY: 杨熊		DATE: 11-8-6	
APPROVED BY: 陈宗渊		DATE: 11-8-6	
UNIT: mm [inch]		MOLD NO.	
SCALE:1:1		DRAW NO. A-1-5018XXRT	
		SHEET 1 OF 1	