


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A					

Specification


Rated Voltage: 125V AC/DC
 Rated Current: 2A AC/DC
 Contact Resistance: 20mohms max
 Insulator Resistance: 1000Megohms min
 Dielectric Withstanding: 1000V AC
 Operating Temperature: -40°C~+105°C
 Material
 Plastic Material: PA6T UL94V-0/Black
 Pin: Brass
 Gold flash

DSX - 3 200 S - XXP - B 056 030

① Packing code: O=Bag; B=BOX; T=Tube; R=Reel; C=Reel+cap; P=Tray; M=Mylar
 ② 3=Box Header
 ③ 200=Pitch 2.00mm
 ④ S=Vertical; R=Right angle
 ⑤ NO.of circuits
 ⑥ B=PA6T
 ⑦ Plastic Height: 5.60mm
 ⑧ Exposed D: 030=3.00mm

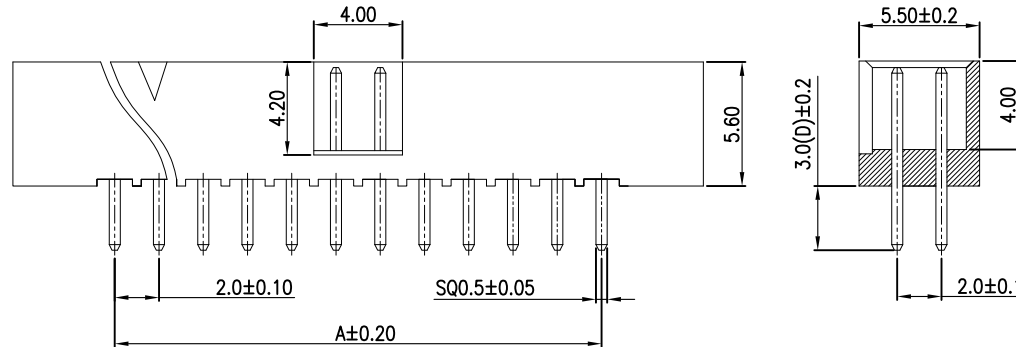

pin/ ROW	A	B
6	4.00	13.20
8	6.00	15.20
10	8.00	17.20
12	10.00	19.20
14	12.00	21.20
16	14.00	23.20
20	18.00	27.20
24	22.00	31.20
26	24.00	33.20
28	26.00	35.20
30	28.00	37.20
32	30.00	39.20
34	32.00	41.20
36	34.00	43.20
40	38.00	47.20
44	42.00	51.20
50	48.00	57.20

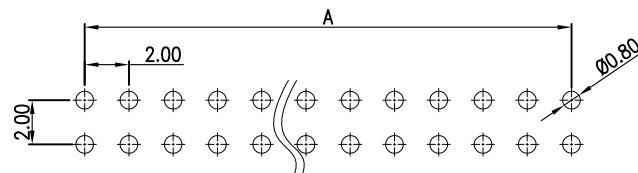

P.C.B. LAYOUT

ITEM	PART NO	SPECIFICATION		O'TY
1	2-3200-BBK	2.0mm PA6T Black BOX Header		1pcs
2	5-Q050x082S-G	SQ0.5mm L=8.2MM Brass Gold flash PIN		XXpcs
3				
TOLERANCE UNSPECIFIED:		 東莞得升電子機械有限公司 DISNT MECHANICAL ELECTRONIC CO.,LTD		
X. ±0.50 X.X ±0.25 X.XX ±0.15 X.XXX ±0.05 X.* ±2" X.X* ±1"				
PROJECTION:		DRAWN BY :	DATE :	TITLE:
		江春龙	2020-12-12	成品規格圖
UNIT: mm [inch]		CHECKED BY:	DATE :	PART NO.
		李院	2020-12-12	3200S
APPROVED BY:		DATE :	MOLD NO.	/
		邱锦荣	DRAW NO.	1-BOX007
SIZE: A4		2020-12-12	SHEET	1 OF 1