


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-09-10	

Specification

Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 5000Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -40°C~+105°C
Contact Material: Brass
Finish: Gold Flash Plated

Ordering information

DSX-102 2 XX S G-060022X

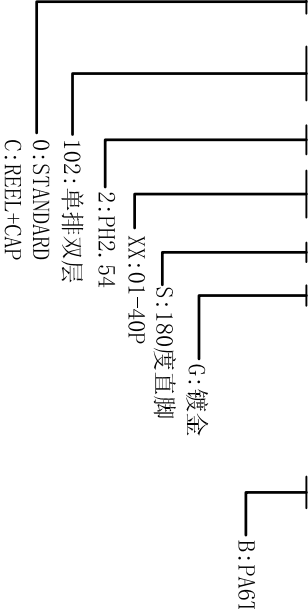

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-101240-0254X	2.54mm 塑膠 1x40P, 塑膠高2.54(X)	2PCS
2	5-0064x187R-G	0.64四方鍍金針, 90°長18.7	NPCS

DISMT 得升電子股份有限公司
DISMT ELECTRONIC CO., LTD

TOLERANCE UNSPECIFIED: X: ±0.50 XX: ±0.25 XXX: ±0.15 X.XX: ±0.05 X.X' ±2" X.X' ±1"		DRAWN BY: 杨熊	DATE: 12-6-14	TITLE: 成品规格图	
PROJECTION: 		CHECKED BY: 何智权	DATE: 12-6-14	PART NAME: 2.54mm Pin Header	
APPROVED BY: 吴腾财		DATE: 12-6-14	PART NO. DSX-1022XXSG-060022X	MOLD NO.	
UNIT: mm [inch]		DRAW NO. A-DSX-1022XXSG-060022X			
SCALE: 1:1		SHEET 1 OF 1			