




REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			672116-1X200LX-C/D	06-05-16	
B			新版本	06-11-15	均夢良

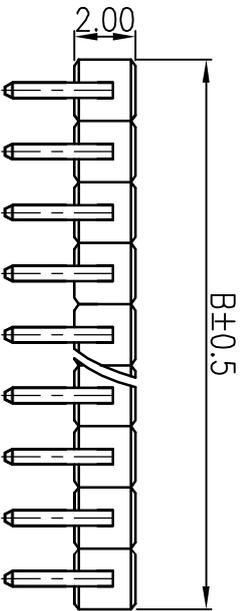



Specification

Rated Voltage: 125V AC/DC
 Rated Current: 2A AC/DC
 Contact Resistance: 25mohms max
 Insulator Resistance: 1000Megohms/Min.
 Dielectric Withstanding: 1000V AC
 Operating Temperature: -40°C~+105°C
 Plastic Material: PBT+30%GF, UL94V-0, Black
 Contact Material: Brass
 Finish: Gold Flash Plated


Ordering information

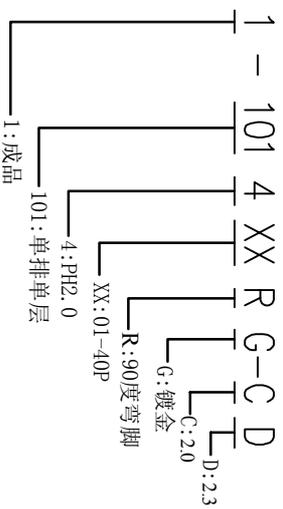

pin	A	B
2	2.00	4.00
3	4.00	6.00
4	6.00	8.00
5	8.00	10.00
6	10.00	12.00
7	12.00	14.00
8	14.00	16.00
9	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00

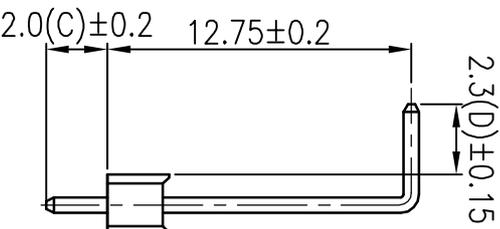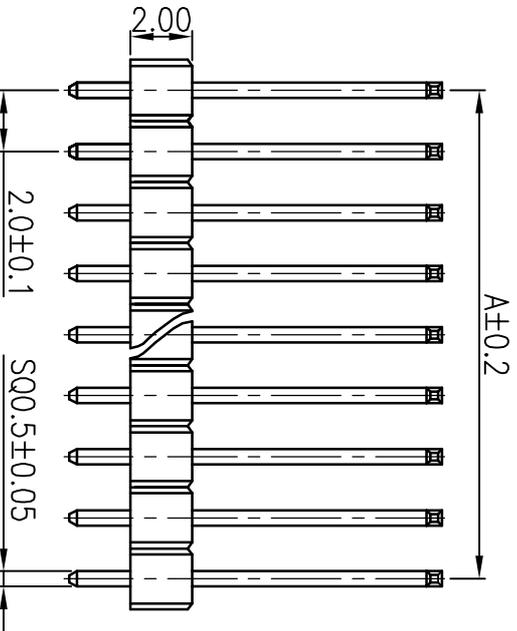

ITEM	PART NO	SPECIFICATION	QTY
1	2-1014XX-020	2.0mm塑膠1XNP, 塑膠高2.0	1PCS
2	5-0050X178R-G	0.5四方鍍金針, 90°長17.8	NPCS

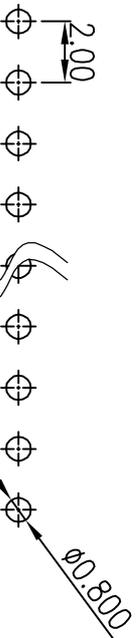

P.C.B LAYOUT

TOLERANCE UNSPECIFIED: X ±0.50 XX ±0.25 XXX ±0.10 XXXX ±0.05 X' ±2° XX' ±1°		PROJECTION: 		UNITS: mm [inch] SCALE: 1:1 SIZE: A4	
DISNT 東莞得升機械電子有限公司 DISINT MECHANICAL ELECTRONIC CO.,LTD		DRAWN BY: 何智权 DATE: 11-15-6		CHECKED BY: 何智权 DATE: 11-15-6	
TITLE: 成品规格圖 PART NAME: 2.0mm Pin Header		PART NO.: 1-1014XXRG-020023		APPROVED BY: 陈宗渊 DATE: 11-15-6	
MOLD NO.:		DRAW NO.: A-1-1014XXRG-020023		SHEET: 1 OF 1	