



REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	06-10-19	

Specification




Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 5000Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -40°C~+105°C
Plastic Material: PA6T,LCP,UL94V-0,Black
Contact Material: Brass
Finish: Gold Flash Plated

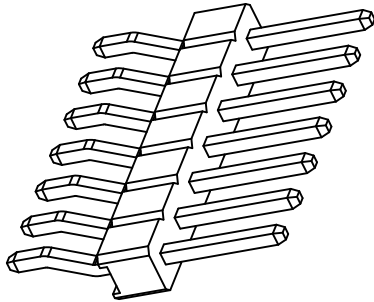

Ordering information

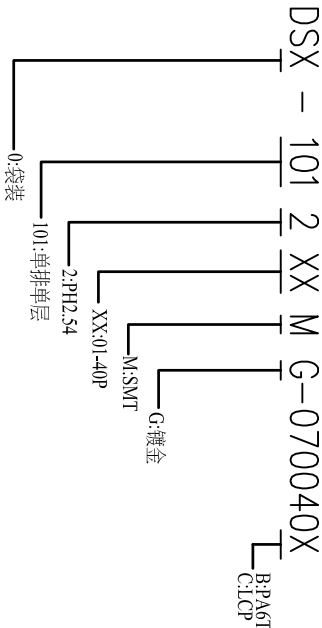

pin	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.6

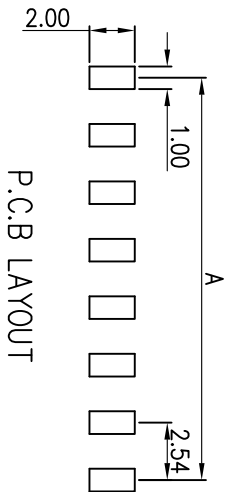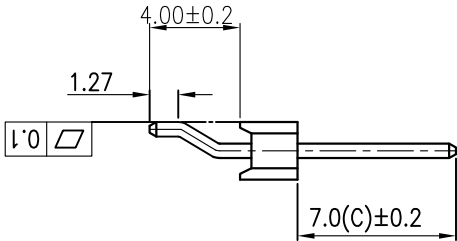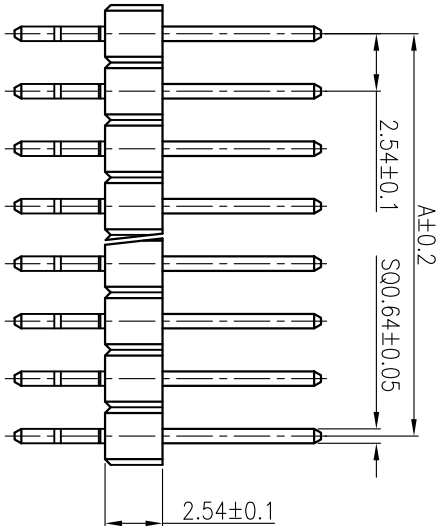

ITEM	PART NO	SPECIFICATION	Q'ty
1	2-1012XX-0254	2.54mm 塑膠 1xNP, 塑膠高2.54	1PCS
2	5-0064x137-G	0.64四方鍍金針,長13.7	NPCS

TOLERANCE UNSPECIFIED:		DISMT 得升電子股份有限公司	
X	±0.50	DRAWN BY: 阮志龙	
XX	±0.25	DATE: 2018.06.20	
XXX	±0.10	CHECKED BY: 阮志龙	
XXX	±0.05	DATE: 2018.06.20	
XX'	±2"	PART NAME: 2.54mm Pin Header	
XX'	±1"	PART NO. DSX-1012XXMG-070040X	
PROJECTION:		MOLD NO.	
UNIT: mm [inch]		DRAW NO. DSX-1012XXMG-070040X	
SCALE:1:1		SHEET 1 OF 1	
SIZE: A4			
APPROVED BY: 邱台安			
DATE: 2018.06.20			