

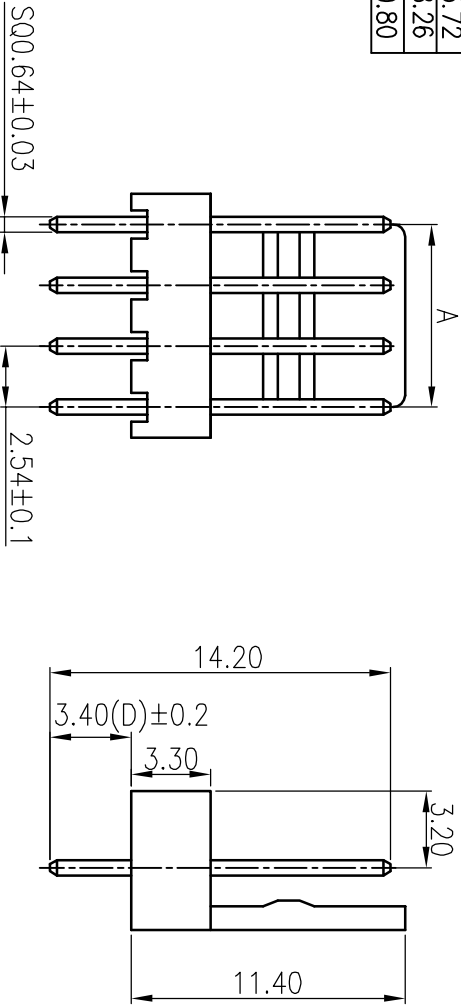

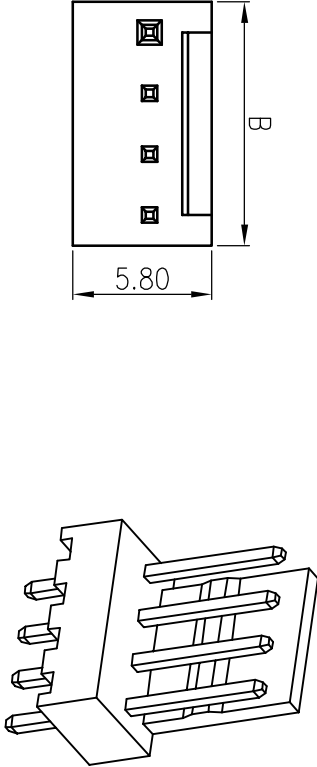


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	06-12-07	

Specification

Rated Voltage: 250V AC/DC
Rated Current: 5A AC/DC
Contact Resistance: 30mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 1500V AC
Operating Temperature: -25℃~+105℃
Plastic Material: PA66+30%GF, UL94V-0,本色
Contact Material: Brass
Finish: Tin Plated

Ordering information

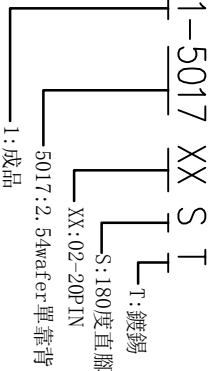

P.C.B LAYOUT

TOLERANCE UNSPECIFIED:								
XX	±0.50		PROJECTION:					
XX	±0.25							
XXX	±0.10							
XXX	±0.05							
XX	±T							
UNIT: mm [inch]								
SCALE:1:1	SIZE: A4							
DRAWN BY : 杨熊		DATE : 12-7-07		TITLE: 成品规格图				
CHECKED BY: 何智权		DATE : 12-7-07		PART NAME: 2.54mm(0.2")pitch Water				
APPROVED BY: 陈宗洲		DATE : 12-7-07		PART NO. 1-5017XXST				
				MOLD NO.				
				DRAW NO. A-1-5017XXST				
				SHEET 1 OF 1				