

REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				2022/10/07	

SPECIFICATIONS:

Voltage Rating:60V DC

Current Rating: 0.5A Max.(Each Pin)

Contact Resistance: 60mΩ MAX

Insulation Resistance: 800MΩ MIN






Dielectric Withstanding : AC 500V

Operating Temperature : -25°C~+85°C


Contact Material: Copper Alloy

Insulator Material: Thermoplastic, UL94V-0

Plating: Gold Flash

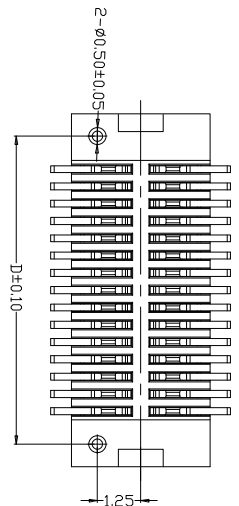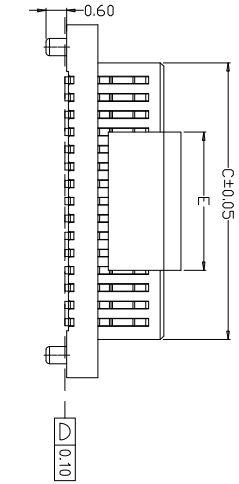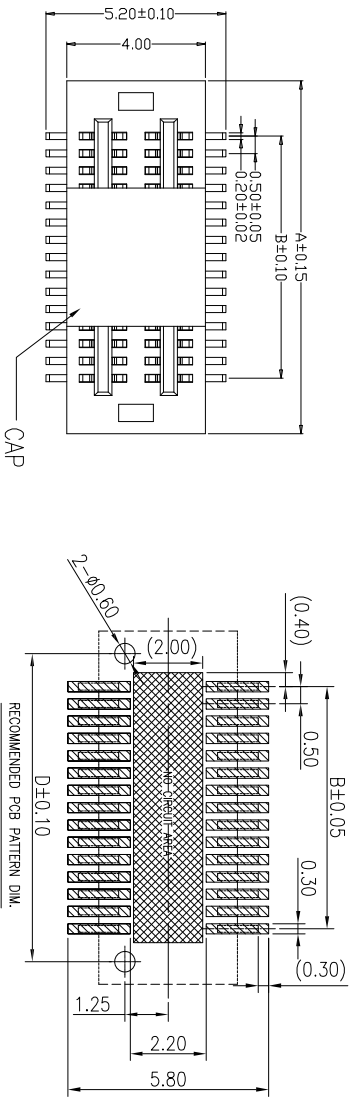

T-DBPXXSB7GX-XX

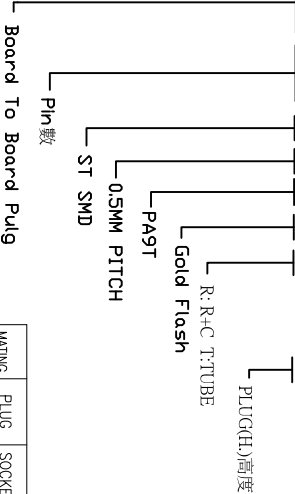

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	F
3.0	0.8	2.2	1.6
3.5	1.3	2.2	1.6
4.0	1.0	3.0	1.9
4.5	1.0	3.5	1.9
5.0	1.0	4.0	1.9
5.5	1.0	4.5	1.9
6.0	2.0	4.0	1.9
6.5	2.0	4.5	1.9
			100

TOLERANCE UNspecified:		X.X ±0.25		X.XX ±0.15		X.XXX ±0.05		ANGLE ±2°	
PROJECTION:		CHECKED BY: 阮志龍		DATE: 2022/10/07		TITLE: 成品規格圖		DESCRIPTION: BTB0.5mm 2*XPIN 雙槽 公座 帶定位柱 帶夾持蓋	
UNIT: mm [Inch]		APPROVED BY: 何智權		DATE: 2022/10/07		PART NO. T-DBPXXSB7GX-XX		MOLD NO.	
SCALE:1:1		SIZE: A4		DATE: 2022/10/07		DRAW NO. T-DBPXXSB7GX-XX		SHEET 1 OF 1	

DISNT 得升電子股份有限公司 DISNT ELECTRONIC CO.,LTD