
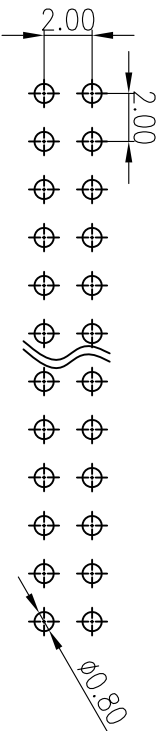


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-10-20	

pin	A	B
2x3	4.00	7.90
2x4	6.00	9.90
2x5	8.00	11.90
2x6	10.00	13.90
2x7	12.00	15.90
2x8	14.00	17.90
2x9	16.00	19.90
2x10	18.00	21.90
2x11	20.00	23.90
2x12	22.00	25.90
2x13	24.00	27.90
2x14	26.00	29.90
2x15	28.00	31.90
2x16	30.00	33.90

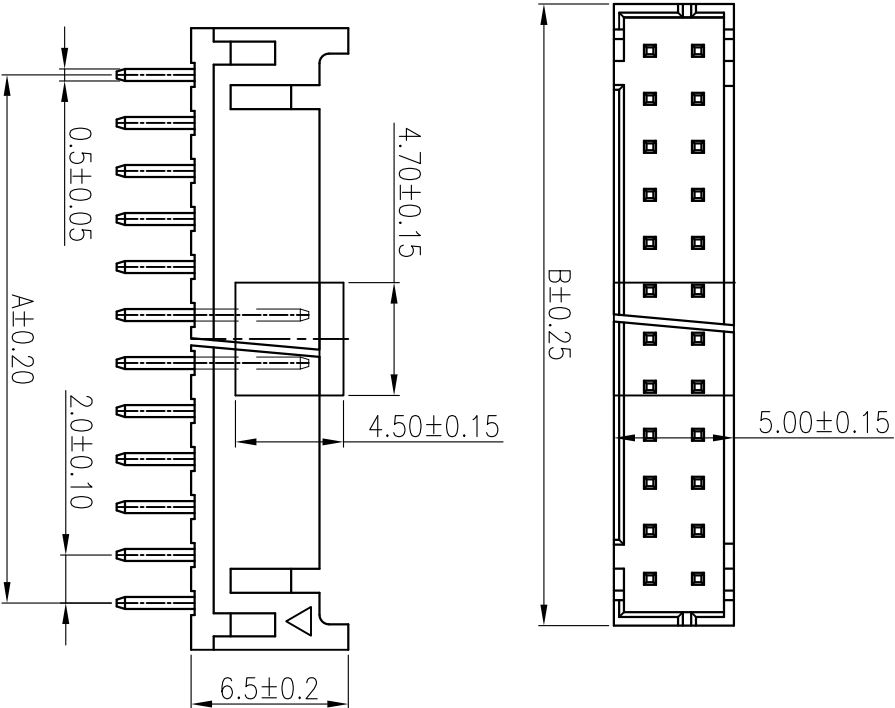

P.C.B LAYOUT

Specification

Rated Voltage: 100V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 800V AC
Operating Temperature: -45°C~+85°C
Plastic Material: PA66+30%GF, UL94V-0,
Contact Material: Brass
Finish: Tin Plated

Ordering information

1-5027 XX S WT -D- A X
S: 180度腳
XX: 06-32PIN
D: 3.1
A: 灰色
X: CAP
1: 成品
5027: PHD2.0Wafer

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5027XX	2.0mm塑膠2xNP, 塑膠高6.5(UCP)	1PCS
2	5-Q050x080S-WT	0.5四方鍍霧銅針, 180度長8.0	NPCS

TOLERANCE UNSPECIFIED: X ±0.50 XX ±0.25 XXX ±0.15 XXX ±0.05 X' ±2" XX' ±1"				DRAWN BY: 阮志龍		DATE: 2015-11-14		PART NAME: PHD2.0mm Wafer	
PROJECTION:				CHECKED BY: 阮志龍		DATE: 2015-11-14		PART NO. 1-5027XXSWT-031-AX	
UNIT: mm [inch]				APPROVED BY: 邱台安		DATE: 2015-11-14		DRAW NO. A-1-5027XXSWT-031-AX	
SCALE: 1:1				SIZE: A4		SHEET		1 OF 1	