

REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-09-09	

Specification

Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 30mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 500V AC
Operating Temperature: -25°C~+85°C
Plastic Material: PA66,UL94V-2,
Contact Material: Brass
Finish: Tin Plated





Ordering information

1-5017 XX R T-D
D:3.4
T:鍍錫
R:90度彎腳
XX:02-20PIN
5017:2.54wafer單靠背
1:成品

ITEM	PART NO	SPECIFICATION	QTY
1	2-5017XX	2.54mmWafer塑膠1xNP,材質PA66	1PCS
2	5-0064x178R-T	0.64四方鐵線針,90度長17.8	NPCS

TOLERANCE UNSPECIFIED: XX ±0.50 XX ±0.25 XXX ±0.15 XXX ±0.05 XX ±2° XX ±1°				DRAWN BY: 陳雄軍 DATE: 10-6-14 TITLE: 成品規格圖 PART NAME: 2.54mm pitch Wafer PART NO. 1-5017XXRT-034 MOLD NO. DRAW NO. A-1-5017XXRT-034 SHEET 1 OF 1			
PROJECTION: UNIT: mm [inch] SCALE:1:1 SIZE: A4				CHECKED BY: 何智权 DATE: 10-6-14 APPROVED BY: 陳宗渊			

pin	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

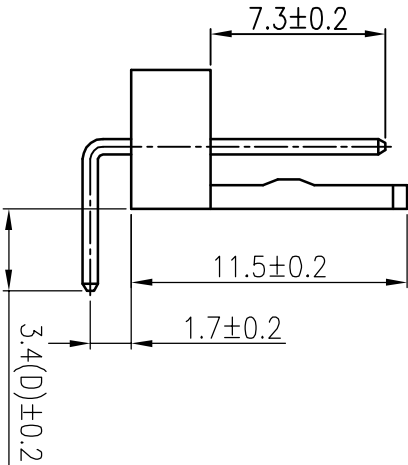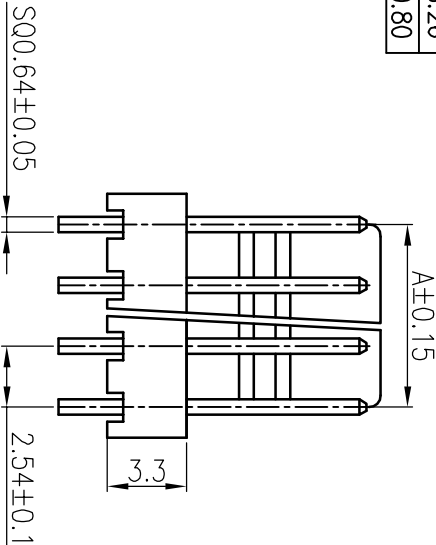

P.C.B LAYOUT