
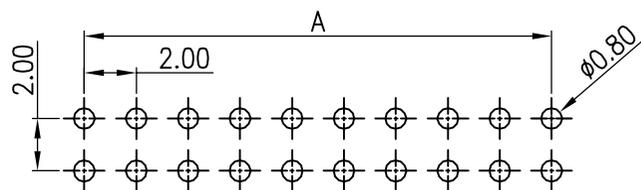
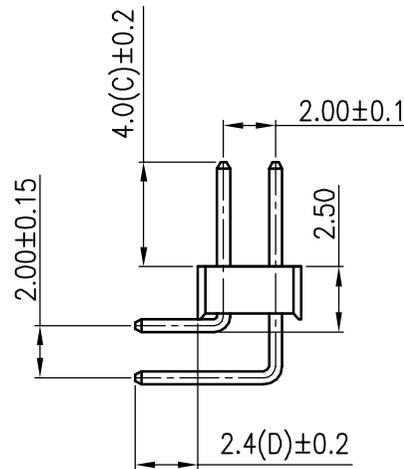
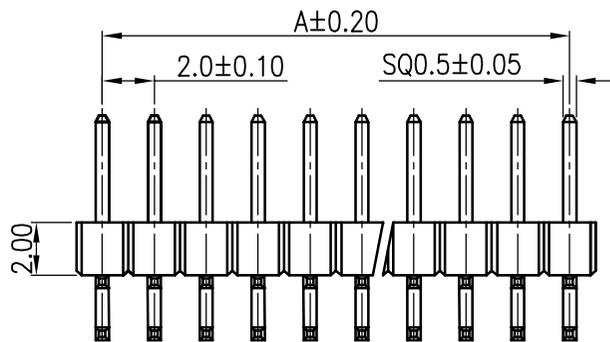


pin	A	B
2X2	2.00	4.00
2X3	4.00	6.00
2X4	6.00	8.00
2X5	8.00	10.00
2X6	10.00	12.00
2X7	12.00	14.00
2X8	14.00	16.00
2X9	16.00	18.00
2X10	18.00	20.00
2X11	20.00	22.00
2X12	22.00	24.00
2X13	24.00	26.00
2X14	26.00	28.00
2X15	28.00	30.00
2X16	30.00	32.00
2X17	32.00	34.00
2X18	34.00	36.00
2X19	36.00	38.00
2X20	38.00	40.00
2X21	40.00	42.00
2X22	42.00	44.00
2X23	44.00	46.00
2X24	46.00	48.00
2X25	48.00	50.00
2X26	50.00	52.00
2X27	52.00	54.00
2X28	54.00	56.00
2X29	56.00	58.00
2X30	58.00	60.00
2X31	60.00	62.00
2X32	62.00	64.00
2X33	64.00	66.00
2X34	66.00	68.00
2X35	68.00	70.00
2X36	70.00	72.00
2X37	72.00	74.00
2X38	74.00	76.00
2X39	76.00	78.00
2X40	78.00	80.00

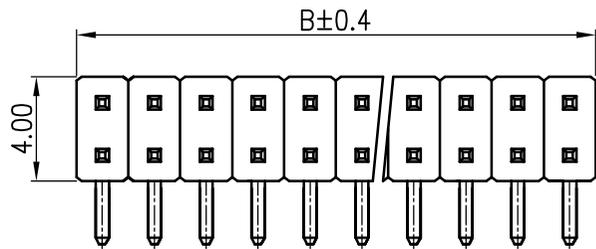


P.C.B LAYOUT

REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-03-08	

Specification

Rated Voltage:	125V AC/DC
Rated Current:	2A AC/DC
Contact Resistance:	20mohms max
Insulator Resistance:	1000Megohms/Min.
Dielectric Withstanding:	500V AC
Operating Temperature:	-40°C~+105°C
Plastic Material:	PA6T+30%GF,UL94V-0,Black
Contact Material:	Brass
Finish:	Gold Flash Plated

Ordering information

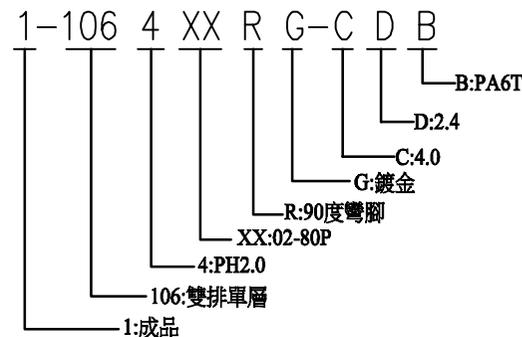

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1024XX-020B	2.0mm塑膠2xNP,塑膠高2.0(PA6T)	1PCS
2	5-Q050x095R-G	0.5四方鍍金針,90°長9.5	NPCS
3	5-Q050x135R-G	0.5四方鍍金針,90°長13.5	NPCS

TOLERANCE UNSPECIFIED: X. ±0.50 X.X ±0.25 X.XX ±0.15 X.XXX ±0.05 X.' ±2' X.X' ±1'		東莞得升機械電子有限公司 DISNT MECHANICAL ELECTRONIC CO.,LTD	
DRAWN BY : 阮志龙 DATE : 2016-01-25		TITLE : 成品規格圖 PART NAME : 2.0mm Pin Header	
PROJECTION :		CHECKED BY : 阮志龙 DATE : 2016-01-25	
UNIT : mm [inch] SCALE:1:1 SIZE: A4		APPROVED BY : 邱台安 DATE : 2016-01-25	
		PART NO. : 1-1064XXRG-040024B MOLD NO. : DRAW NO. : A-1-1064XXRG-040024B SHEET : 1 OF 1	