


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A				08-01-24	

Specification





Rated Voltage: 125V AC/DC
Rated Current: 2A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 5000Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -40C~+105C
Plastic Material: PA6T+30%GF, UL94V-0,Black
Contact Material: Brass
Contact Finish: Gold Flash Plated

Nickel Plated 50u" min
Gold Flash Plated 1u" min

Ordering information

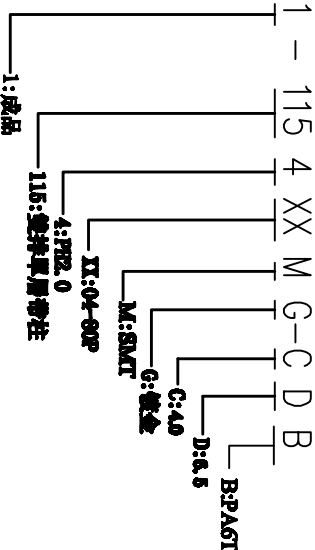

pin /row	A	B	C
2x2	2.00	4.00	0.00
2x3	4.00	6.00	2.00
2x4	6.00	8.00	4.00
2x5	8.00	10.00	6.00
2x6	10.00	12.00	8.00
2x7	12.00	14.00	10.0
2x8	14.00	16.00	12.0
2x9	16.00	18.00	14.0
2x10	18.00	20.00	16.0
2x11	20.00	22.00	18.0
2x12	22.00	24.00	20.0
2x13	24.00	26.00	22.0
2x14	26.00	28.00	24.0
2x15	28.00	30.00	26.0
2x16	30.00	32.00	28.0
2x17	32.00	34.00	30.0
2x18	34.00	36.00	32.0
2x19	36.00	38.00	34.0
2x20	38.00	40.00	36.0
2x21	40.00	42.00	38.0
2x22	42.00	44.00	40.0
2x23	44.00	46.00	42.0
2x24	46.00	48.00	44.0
2x25	48.00	50.00	46.0
2x26	50.00	52.00	48.0
2x27	52.00	54.00	50.0
2x28	54.00	56.00	52.0
2x29	56.00	58.00	54.0
2x30	58.00	60.00	56.0
2x31	60.00	62.00	58.0
2x32	62.00	64.00	60.0
2x33	64.00	66.00	62.0
2x34	66.00	68.00	64.0
2x35	68.00	70.00	66.0
2x36	70.00	72.00	68.0
2x37	72.00	74.00	70.0
2x38	74.00	76.00	72.0
2x39	76.00	78.00	74.0
2x40	78.00	80.00	76.0

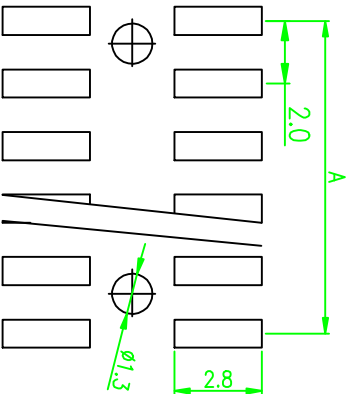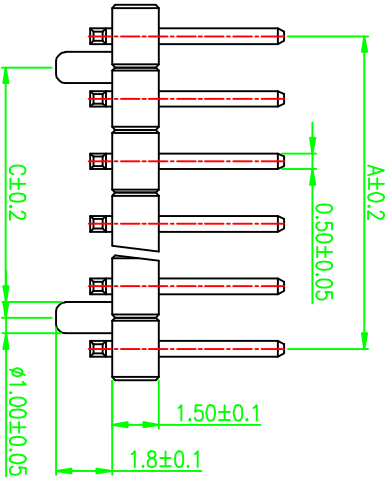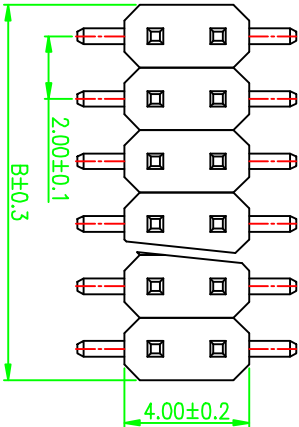

P.C.B LAYOUT

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1154XX-015B	2-1154XX-015B 115:雙排單層密注 4:7P2.0	1PCS
2	5-Q050X080R-G	0.5四方鍍金針,90度長8.0	NPCS

TOLERANCE UNSPECIFIED:		TITLE: 成品規格圖	
X	±0.50	PART NAME: 2.0mm Pin Header	
XX	±0.25	PART NO. 1-1154XXMG-040065B	
XXX	±0.10	MOLD NO.	
XXXX	±0.05	DRAW NO. A-1-1154XXMG-040065B	
X.X	±1	SHEET 1 OF 1	

PROJECTION:	CHECKED BY:	DATE:	DATE:

UNIT: mm [inch]	APPROVED BY:	DATE:	DRAW NO.
SCALE:1:1			