
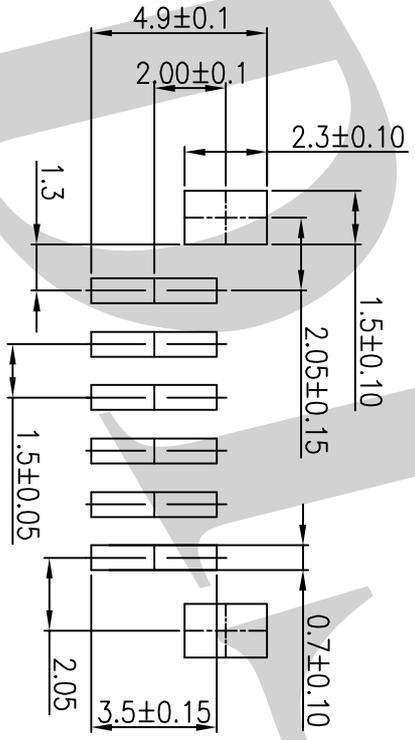
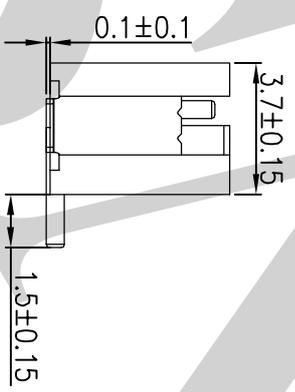
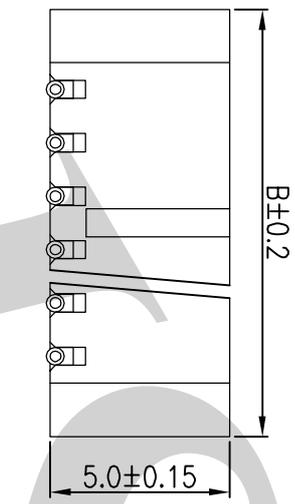
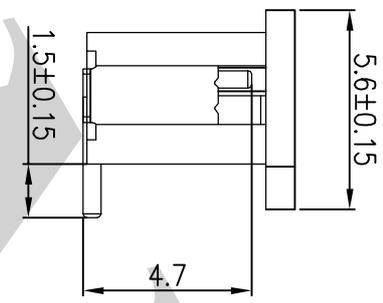


pin	A	B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	10.50
6	7.50	12.00
7	9.00	13.50
8	10.50	15.00
9	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50

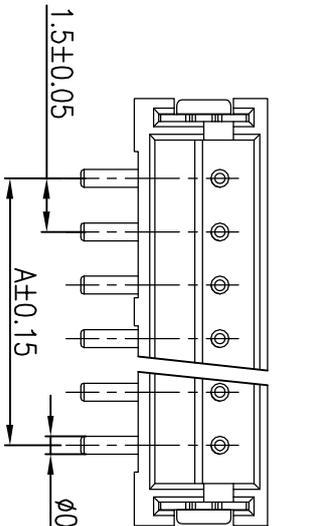

P.C.B LAYOUT

REV.	EQN. NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-11-10	

Specification

Rated Voltage: 50V AC/DC
 Rated Current: 1A AC/DC
 Contact Resistance: 20mohms max
 Insulator Resistance: 500Megohms/Min.
 Dielectric Withstanding: 500V AC
 Operating Temperature: -25°C~+85°C
 Plastic Material: PA9T UL94V-0,
 Contact Material: Phosphor Bronze/Brass
 Finish: Tin Plated

Ordering information

1-5037 XX M S T-E
 E: PA9T
 S: 180度彎脚 立式
 M: SMT
 XX: 02-1SP
 5037: 1.5 Wafer 180°
 1: 成品

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5037XX-E	1.5mm 遮膠 1XNP 遮膠高 5.0(PA9T)	1PCS
2	5-R050X076R-1	0.5圓形鍍錫針 90度長 7.6	NPCS
3	3-5037T	1.5MP 接地片端子 磷銅鍍錫	2PCS

DISNT 得升電子股份有限公司
 DISNT ELECTRONIC CO.,LTD

TOLERANCE UNSPECIFIED: X ±0.50 XX ±0.25 XXX ±0.10 XXXX ±0.05 X.X ±1 X.X ±2	DRAWN BY: 楊熊 DATE: 11-8-24 PART NAME: 成品規格圖 PART NO.: 1-5037XXMST-E MOLD NO.: DRAW NO.: A-1-5037XXMST-E SHEET: 1 OF 1
PROJECTION: UNF: mm [inch] SCALE: 1:1 SIZE: A4	CHECKED BY: 何智權 DATE: 11-8-24 APPROVED BY: 陳宗淵 DATE: 11-8-24