



PIN	A	B
2X5	4.0	8.1
2X10	9.0	13.1
2X15	14.0	18.1
2X20	19.0	23.1
2X25	24.0	28.1

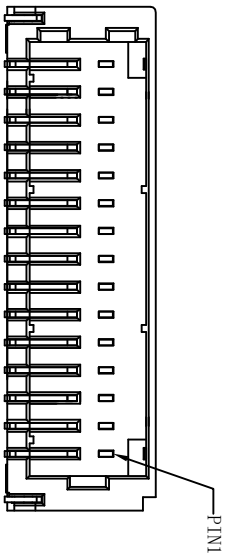


Specification

Rated Voltage:	50V AC/DC
Rated Current:	1A AC/DC
Contact Resistance:	20mohms max
Insulator Resistance:	100Megohms/Min.
Dielectric Withstanding:	500V AC/minuie
Operating Temperature:	-25°C~+85°C
Plastic Material:	PA9T,UL94V-0
Contact Material:	Phosphor Bronze
Finish:	Gold Plated

Ordering information

1-5046	XX	M	R	G-056	E
1: 5046: 1.0mm Wafer 双排					
XX: 04-50P					
M: SMT					
G: 镀金					
H: 5.6					
E: PA9T					
R: 90° 卧式					

Recommended P.C.B Layout

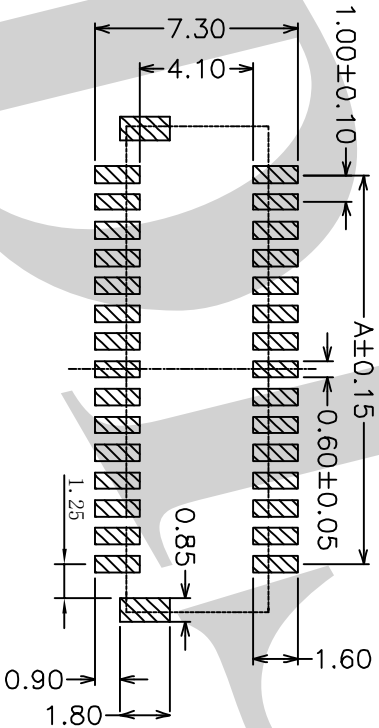

TOLERANCE UNSPECIFIED:		得升電子股份有限公司 <i>DISNT ELECTRONIC CO.,LTD</i>			
X	±0.50				
X,X	±0.25				
X,X,X	±0.15				
X,X,X,X	±0.05				
X*	±2°				
XX*	±1°	DRAWN BY : 杨熊		DATE : 12-9-6	
PROJECTION:		CHECKED BY: 何智权		DATE : 12-9-6	
				PART NO. 1-5046XXMRG-056E	
UNIT: mm [inch]		APPROVED BY: 邱華棠		DATE : 12-9-6	
SIZE: A4				DRAW NO. A-1-5046XXMRG-056E	
				SHEET 1 OF 1	