
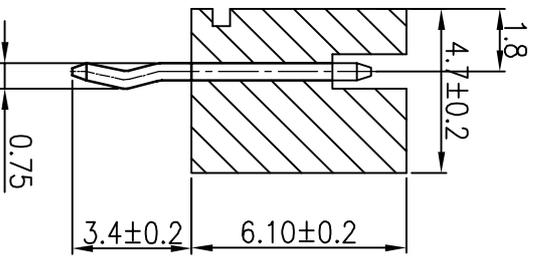
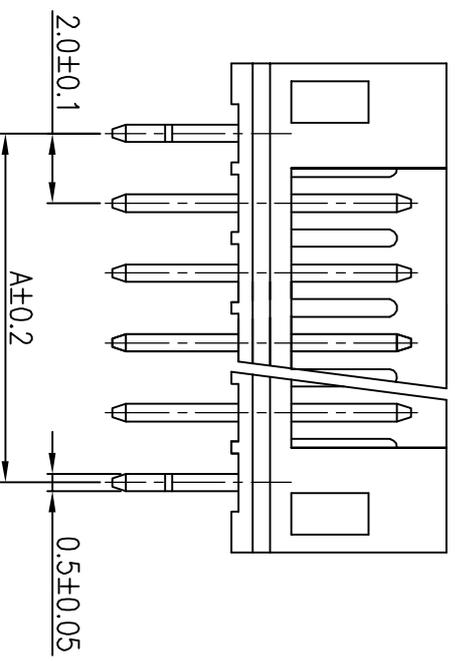


pin	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

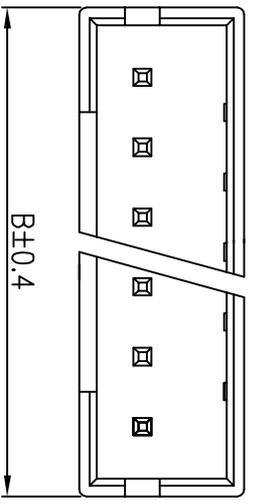


REV.	EQN. NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-07-07	


Specification

Rated Voltage: 125V AC/DC
 Rated Current: 2A AC/DC
 Contact Resistance: 20mohms max
 Insulator Resistance: 1000Megohms/Min.
 Dielectric Withstanding: 800V AC
 Operating Temperature: -25°C~+85°C
 Plastic Material: PA66, UL94V-2,
 Contact Material: Brass
 Finish: Tin Plated

Ordering information

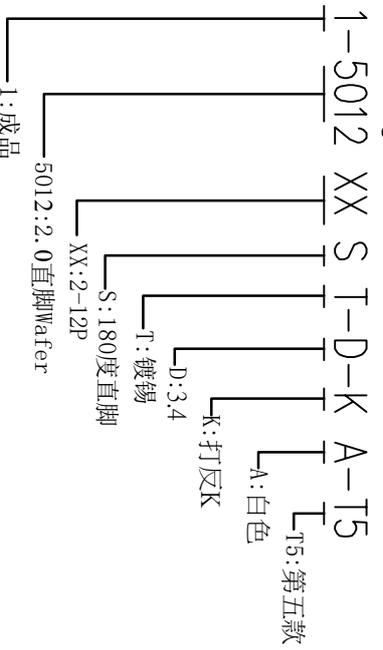

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5012XX-A	2.0mm 塑膠 1x1P, 塑膠高6.1(PA66)	1PCS
2	5-0050X085S-T	0.5四方線線針, 180°長8.5	NPCS

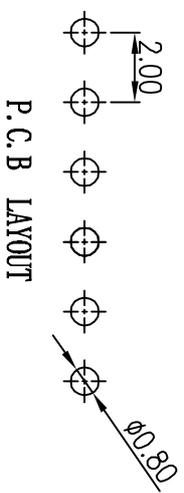

P.C.B LAYOUT

TOLERANCE UNSPECIFIED: X ±0.50 XX ±0.25 XXX ±0.15 XXXX ±0.05 X' ±2 XX' ±1		PROJECTION: 		UNITS: mm [inch] SCALE: 1:1 SIZE: A4	
DISNT 得升電子股份有限公司 DISNT ELECTRONIC CO., LTD		DRAWN BY: 陈雄军 DATE: 6-23-08 PART NAME: 成品规格圖 PART NO.: 1-501206ST-034-KA-T5 MOLD NO.:		APPROVED BY: 陈宗渊 DATE: 6-28-08 DRAW NO.: A-1-501206ST-034-KA-T5 SHEET: 1 OF 1	