

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	OWNER
c				04-21-21	





Ordering information

T-DWRX R E 7 T R-00



T: 镀锡
R: REEL
7: NT 9T
E: PITCH 1.25MM
R: 90D SMT
X: 2-15P

Current rating :1A AC, DC
Voltage rating :125V AC, DC
Temperature range: -25℃~+85℃
Contact resistance: 20mΩMax
Insulation resistance:100MΩMin
Withstanding voltage: 500V AC/minute

NOTES:
MATERIAL:
HOUSING: NYLON -9T+30% G/F
TERMINAL: BRASS (t=0.30mm)
Plating: 50uin Ni Under Plated
100uin Min Sn plated

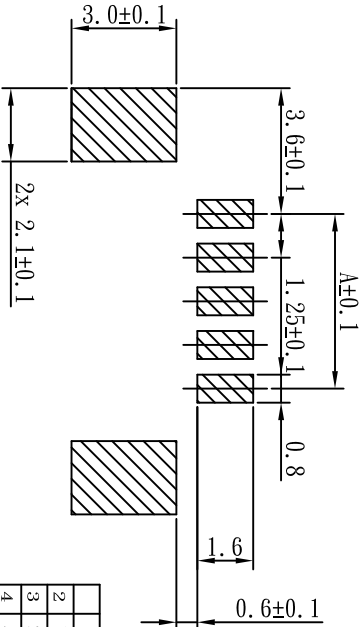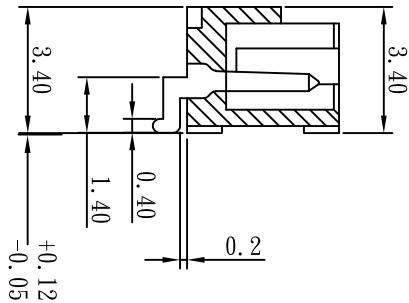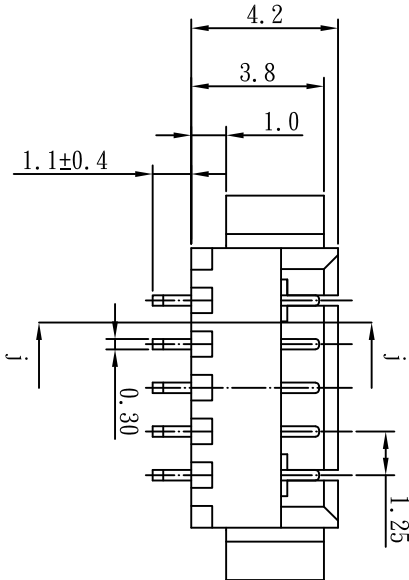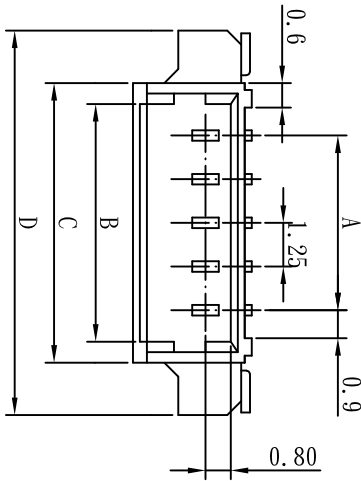

	A	B	C	D
2	1.25	3.05	4.25	7.25
3	2.50	4.30	5.50	8.50
4	3.75	5.55	6.75	9.75
5	5.00	6.80	8.00	11.00
6	6.25	8.05	9.25	12.25
7	7.50	9.30	10.50	13.50
8	8.75	10.55	11.75	14.75
9	10.00	11.80	13.00	16.00
10	11.25	13.05	14.25	17.25
11	12.50	14.30	15.50	18.50
12	13.75	15.55	16.75	19.75
13	15.00	16.80	18.00	21.00
14	16.25	18.05	19.25	22.25
15	17.50	19.30	20.50	23.50

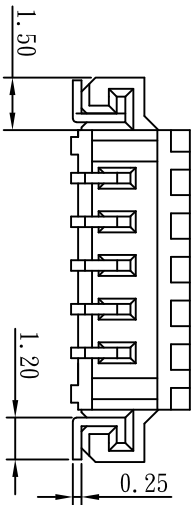

TOLERANCE UNSPECIFIED: X. ±0.50 XX ±0.25 XXX ±0.15 X.XXX ±0.05 X' ±2' X.X' ±1'		DISIT 得升電子股份有限公司 DISIT MECHANICAL ELECTRONIC CO., LTD	
PROJECTION: 	CHECKED BY: 何智权	DATE: 7-22-13	TITLE: 成品规格圖
UNITS: mm [inch]	APPROVED BY: 陈宗渊	DATE: 7-22-13	PART NAME: RIGHT ANGLE SMT TYPE HEADER
SCALE: 1:1	SIZE: A4	DRAW NO. T-DWRKXRE7TR-00	PART NO. T-DWRKXRE7TR-00
		SHEET 1 OF 1	