


REV.	ECH. NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-12-03	

Specification




Rated Voltage: 100V AC/DC
Rated Current: 2A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 800V AC
Operating Temperature: -25°C~+85°C
Plastic Material: PA6T+30%GF,UL94V-0,
Contact Material: Brass
Finish: Tin Plated

Ordering information

1-5013 XX M R WT- B

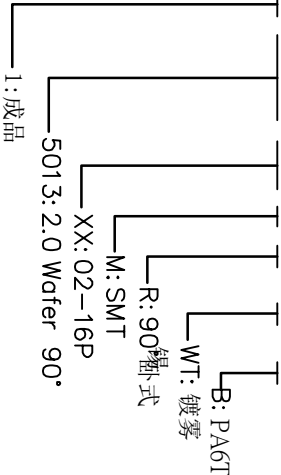

pin	A	B
2	2.0	8.0
3	4.0	10.0
4	6.0	12.0
5	8.0	14.0
6	10.0	16.0
7	12.0	18.0
8	14.0	20.0
9	16.0	22.0
10	18.0	24.0
11	20.0	26.0
12	22.0	28.0
13	24.0	30.0
14	26.0	32.0
15	28.0	34.0
16	30.0	36.0

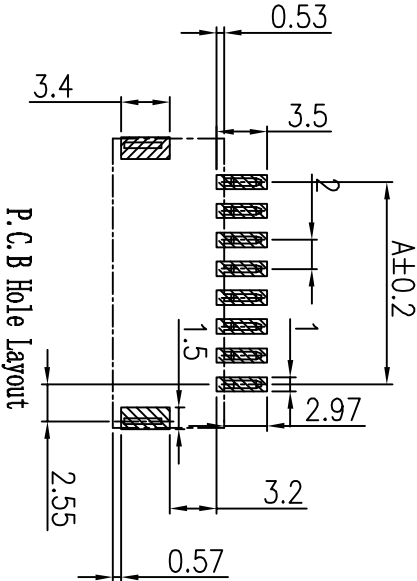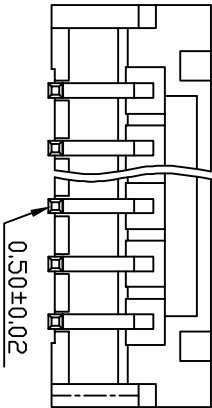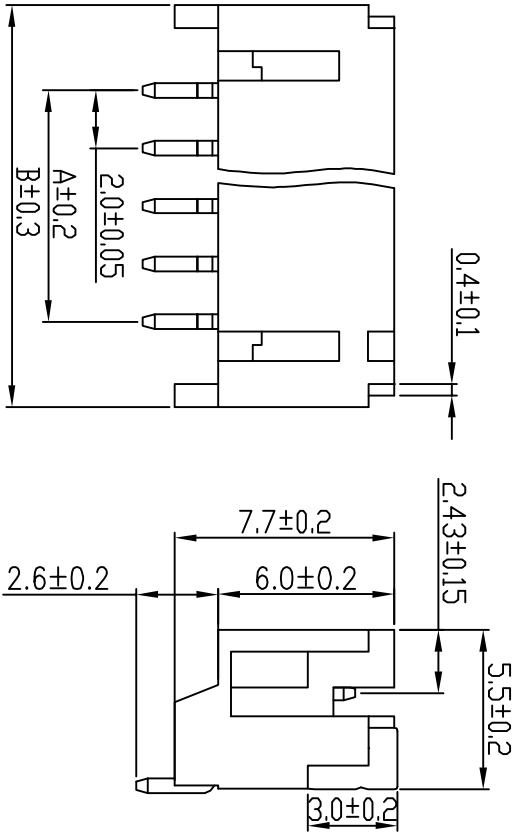

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5013XX-B	2.0mm 塑膠 LNP, 塑膠高7.7(PA6T)	1PCS
2	5-Q050x100R-WT	0.5四方鍍霧銅針, 90度長10.0	NPCS
3	3-5013MT-R	2.0MF 90° 接地片端子 青銅鍍霧銅	2PCS

TOLERANCE UNSPECIFIED:		DRAWN BY: 陈雄军		DATE: 12-03-08		TITLE: 成品规格图	
X, ±0.50		CHECKED BY: 何智权		DATE: 12-03-08		PART NAME: 2.0mm Wafer	
XX, ±0.25		APPROVED BY: 陈宗渊		DATE: 12-03-08		PART NO. 1-5013XXMRWT-B	
XXX, ±0.15		SCALE: 1:1		SIZE: A4		MOLD NO.	
XXXX, ±0.05		PROJECTION:		SHEET 1 OF 1		DRAW NO. A-1-5013XXMRWT-B	
X°, ±2°		UNIT: mm [inch]					
XX', ±1'							