
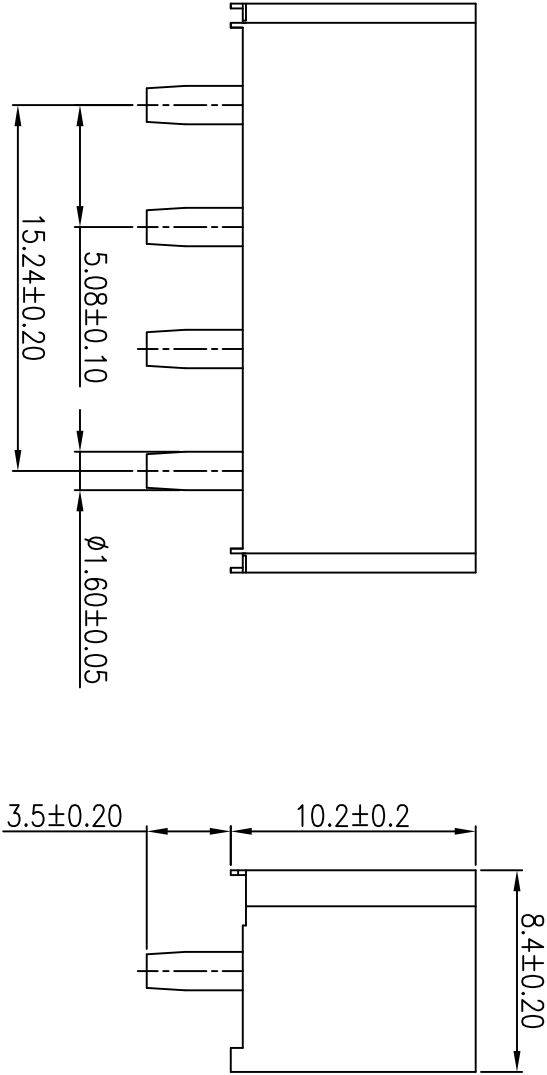
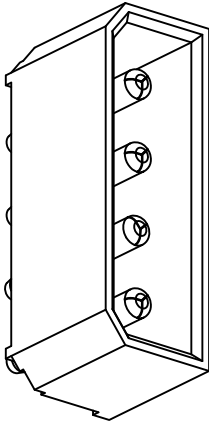


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	19-09-17	


Specification

Rated Voltage: 250V AC/DC
Rated Current: 5A AC/DC
Contact Resistance: 30mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 1500V AC
Operating Temperature: -25C~+105C
Plastic Material: PA66+30GF,UL94V-0,Nature
Contact Material: Brass
Finish: Tin Plated

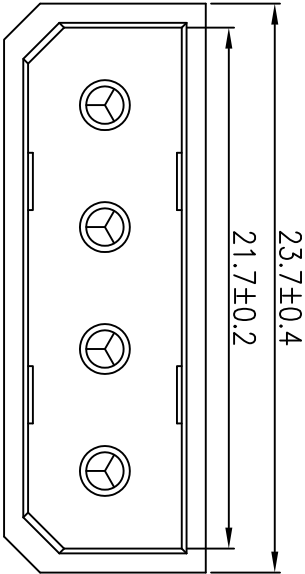

Ordering information

1- 5022 04 S T-035

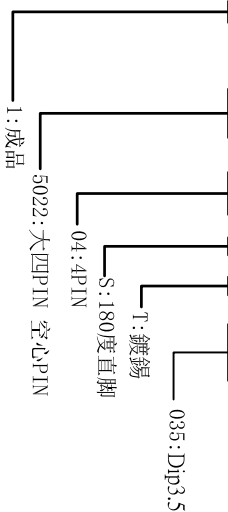

TOLERANCE UNSPECIFIED: XX ±0.50 XX ±0.25 XXX ±0.10 XXX ±0.05 X' ±2" XX' ±1"		DISAT 得升電子股份有限公司 DISAT MECHANICAL ELECTRONIC CO.,LTD	
DRAWN BY: 杨熊	DATE: 19-09-17	TITLE: 成品规格圖	
CHECKED BY: 何智权	DATE: 19-09-17	PART NAME: 5.08mm(0.2")pitch Wafer	
APPROVED BY: 吴腾财	DATE: 19-09-17	PART NO. 1-502204ST-035	
UNIT: mm [inch]		MOLD NO.	
SCALE:1:1	SIZE: A4	DRAW NO. A-1-502204ST-035	
		SHEET 1 OF 1	

