REV.	ECN NO.	LOCTIONS.	DESCRIPTION	DATE	CHANGER
A				12-9-6	



Specification

Rated Voltage:	50V AC/DC
Rated Current:	1A AC/DC
Contact Resistance:	20mohms max
Insulator Resistance:	500Megohms min
Dielectric Withstanding:	500V AC
Operating Temperature:	−25°C~+85°C
Material	
Plastic Material:	PA66 UL94V−0
Pin:	Brass Bright Tin





DSX − 5 1501 R − XXP − A N T
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Packing code: O=Bag ;B=BOX ;T=Tube ; R=Reel ; C=Reel+cap ; P=Tray
② 5=Wafer
③ Series NO
④ R=Right angle
⑤ NO.of circuits
⑥ Material: A=PA66
⑦ Color : N=Natual ;
⑧ Plating code:T=Bright Tin (PIN)

PIN	A	B
02	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
14	19.50	22.50
15	21.00	24.00
16	22.50	25.50

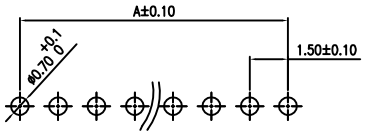

P.C.B. LAYOUT

TOLERANCE UNSPECIFIED:
X. ±0.50
X.X ±0.25
X.XX ±0.15
X.XXX ±0.05
X.° ±2°
X.X° ±1°

PROJECTION:

UNIT: mm [inch]

SIZE: A4

DISNT 東莞得升電子機械有限公司
DISNT MECHANICAL ELECTRONIC CO.,LTD

DRAWED BY : 江春龙	DATE : 2020-12-12	TITLE:	成品規格圖
		PART NAME:	1.5mm DIP 90° Wafer
CHECKED BY: 李院	DATE : 2020-12-12	PART NO.	51501R
		MOLD NO.	/
APPROVED BY: 邱锦荣	DATE : 2020-12-12	DRAW NO.	1-WF076
		SHEET	1 OF 1