
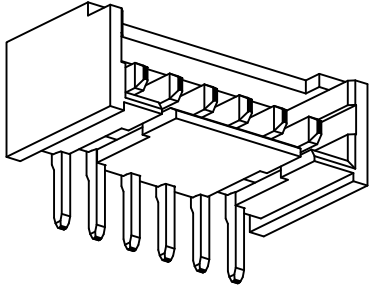



REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				12-9-6	

Specification
Rated Voltage: 125V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 100Megohms min
Dielectric Withstanding: 500V AC
Operating Temperature: -25°C~+85°C
Material
Plastic Material: LCP UL94V-0
Pin: Brass
Bright Tin

DSX - 5 1251 R -XXP - C N I
① ② ③ ④ ⑤ ⑥ ⑦ ⑧
① Packing code: 0=Bag ;B=BOX ;T=Tube ; R=Reel ; C=Reel+trap ; P=Tray
② 5=Water
③ Series NO
④ S=Vertical ; R=Right angle
⑤ NO. of circuits
⑥ Material: C=LCP
⑦ Color : N=Natural
⑧ Plating code : T=Bright Tin (PIN)

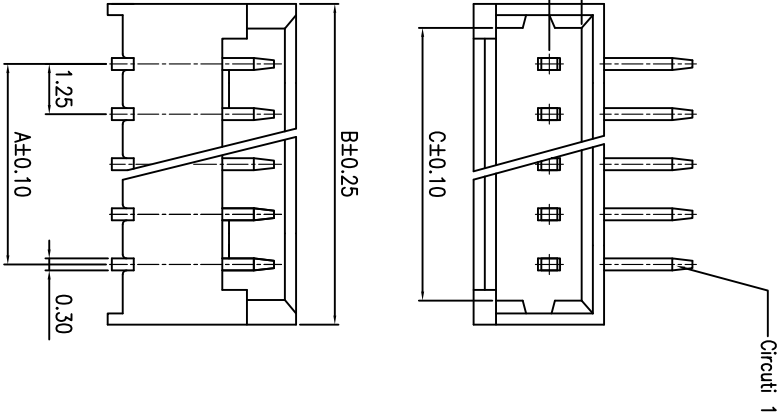

PIN	A	B	C
02	1.25	4.25	3.05
3	2.50	5.50	4.30
4	3.75	6.75	5.55
5	5.00	8.00	6.80
6	6.25	9.25	8.05
7	7.50	10.50	9.30
8	8.75	11.75	10.55
9	10.00	13.00	11.80
10	11.25	14.25	13.05
11	12.50	15.50	14.30
12	13.75	16.75	15.55
13	15.00	18.00	16.80
14	16.25	19.25	18.05
15	17.50	20.50	19.30

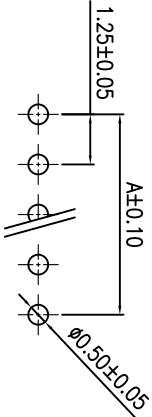

P.C.B. LAYOUT

TOLERANCE UNSPECIFIED: X. ±0.50 XX ±0.25 XXX ±0.15 X.XXX ±0.05 X' ±2' X.X' ±1'		DRAWN BY : 江春龙		DATE : 2020-12-12		TITLE: 成品规格图	
PROJECTION: 		CHECKED BY: 李院		DATE : 2020-12-12		PART NO.: 51251R	
UNIT: mm [Inch]		APPROVED BY: 邱锦荣		DATE : 2020-12-12		DRAW NO.: 1-WF023	
SIZE: A4						SHEET 1 OF 1	

DISNT 東莞得升電子機械有限公司
DISNT MECHANICAL ELECTRONIC CO.,LTD