

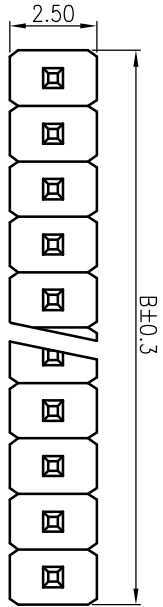


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				09-4-28	

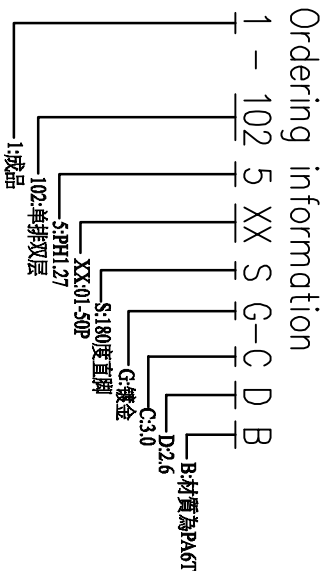


Specification

Rated Voltage: 100V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 500V AC
Operating Temperature: -40°C~+105°C
Plastic Material: PA6T+30%GF, UL94V-0, Black
Contact Material: Brass
Finish: Gold Flash Plated

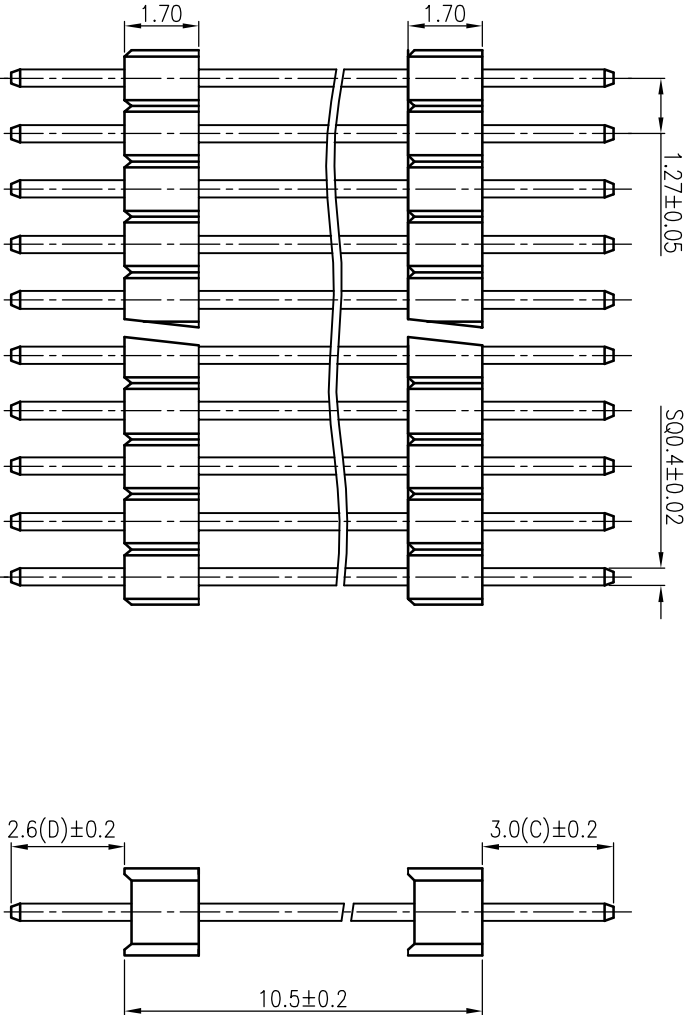

PIN	A	B
2	1.27	2.54
3	2.54	3.81
4	3.81	5.08
5	5.08	6.35
6	6.35	7.62
7	7.62	8.89
8	8.89	10.16
9	10.16	11.43
10	11.43	12.70
11	12.70	13.97
12	13.97	15.24
13	15.24	16.51
14	16.51	17.78
15	17.78	19.05
16	19.05	20.32
17	20.32	21.59
18	21.59	22.86
19	22.86	24.13
20	24.13	25.40
21	25.40	26.67
22	26.67	27.94
23	27.94	29.21
24	29.21	30.48
25	30.48	31.75
26	31.75	33.02
27	33.02	34.29
28	34.29	35.56
29	35.56	36.83
30	36.83	38.10
31	38.10	39.37
32	39.37	40.64
33	40.64	41.91
34	41.91	43.18
35	43.18	44.45
36	44.45	45.72
37	45.72	46.99
38	46.99	48.26
39	48.26	49.53
40	49.53	50.80
41	50.80	52.07
42	52.07	53.34
43	53.34	54.61
44	54.61	55.88
45	55.88	57.15
46	57.15	58.42
47	58.42	59.69
48	59.69	60.96
49	60.96	62.23
50	62.23	63.50

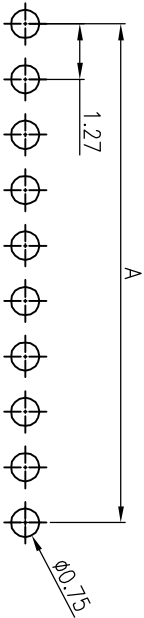

P.C.B LAYOUT

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1015XX-017B	1.27mm间距1xN/P间距高1.7(PA6T)孔径0.4	1PCS
2	5-Q040X161S-G	0.4四方镀金针,180°长16.1	NPCS

TOLERANCE UNSPECIFIED:	
X	±0.50
XX	±0.25
XXX	±0.15
XXXX	±0.05
X"	±2°
X'X	±1°

PROJECTION:	
UNIT: mm [inch]	SCALE:1:1
SIZE: A4	

APPROVED BY:	陈永渊
CHECKED BY:	何智权
DATE:	4-28-09
DATE:	4-28-09
DATE:	4-28-09
DRAWN NO.	A-1-1025XXSG-0300268
SHEET	1 OF 1

DRAWN BY:	杨熊
CHECKED BY:	何智权
DATE:	4-28-09
DATE:	4-28-09
DATE:	4-28-09
DRAWN NO.	A-1-1025XXSG-0300268
SHEET	1 OF 1

DISNT	東莞得升機械電子有限公司
DISVT MECHANICAL ELECTRONIC CO.,LTD	

TITLE:	成品規格圖
PART NAME:	1.27mm Pin Header
PART NO.	1-1025XXSG-0300268
MOLD NO.	