



REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-11-10	







Specification

Rated Voltage: 30V AC/DC
Rated Current: 0.5A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 100Megohms/Min.
Dielectric Withstanding: 200V AC
Operating Temperature: -25°C~+85°C
Plastic Material: PA6T+30%GF, UL94V-0,
Contact Material: Phosphor Bronze
Finish: Tin Plated

Ordering information

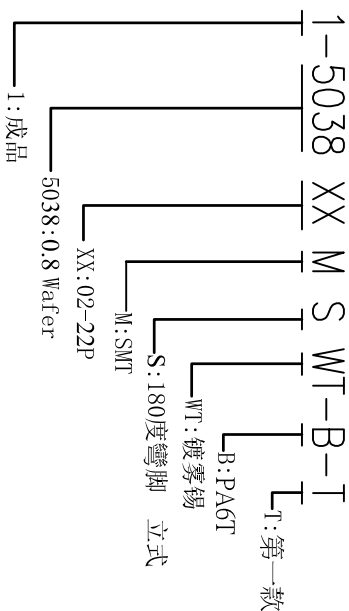

Circuits	Dim. A	Dim. B
2	0.80	3.80
3	1.60	4.60
4	2.40	5.40
5	3.20	6.20
6	4.00	7.00
7	4.80	7.80
8	5.60	8.6
9	6.40	9.40
10	7.20	10.20
12	8.80	11.80
14	10.40	13.40
15	11.20	14.20
16	12.00	15.00
17	12.80	15.80
20	15.20	18.20
22	16.80	19.80

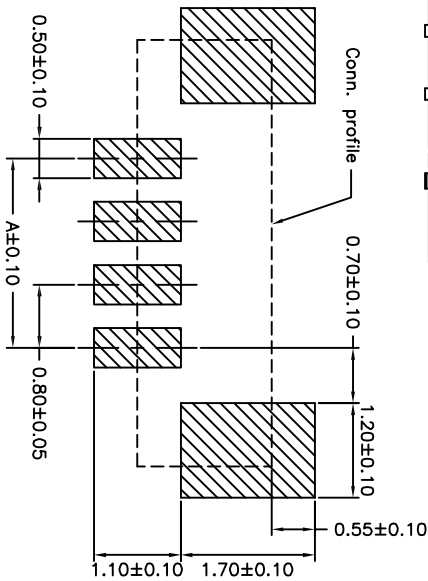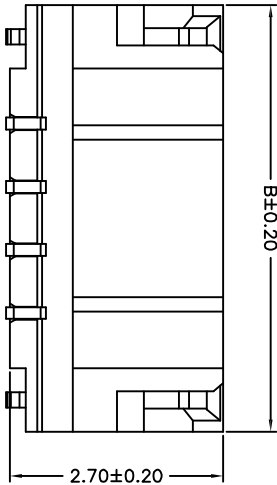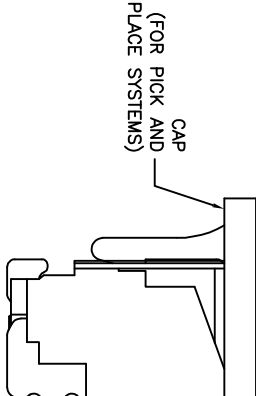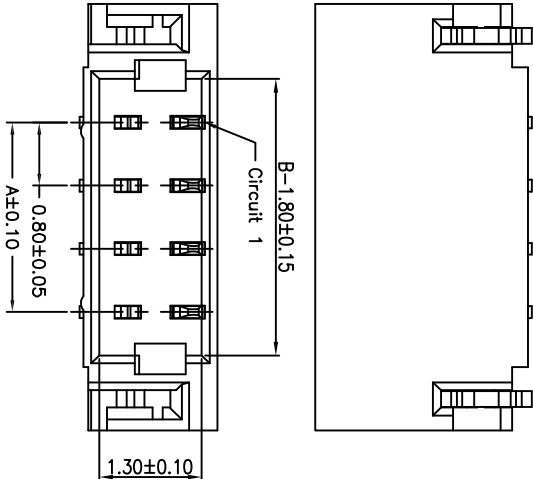

P.C.B. LAYOUT

TOLERANCE UNSPECIFIED:		DISMT 得升電子股份有限公司		DISVT ELECTRONIC CO., LTD	
X	±0.50	DRAWN BY:	阮志龙	DATE:	20130724
X,X	±0.25	CHECKED BY:	何智权	DATE:	20130724
XXX	±0.15	DATE:	20130724	PART NAME:	成品规格图
XXX	±0.05	DATE:	20130724	PART NO.	1-5038XXMSWT-B-T
X,X	±2°	DATE:	20130724	MOLD NO.	
X,X	±1°	DATE:	20130724	DRAW NO.	A-1-5038XXMSWT-B-T
PROJECTION:		DATE:	20130724	SHEET	1 OF 1
UNIT: mm [inch]		DATE:	20130724		
SCALE:1:1		DATE:	20130724		