
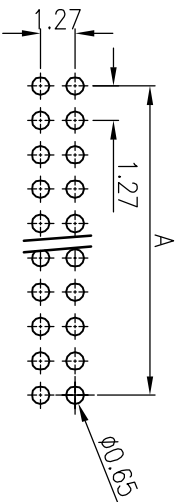
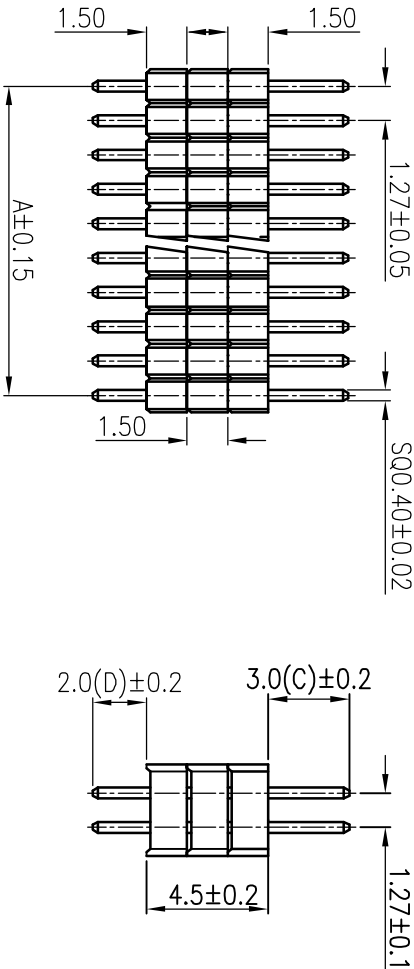


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				09-4-22	

Specification

Rated Current: 500V AC/DC
1A AC/DC
Rated Current: 20mahs max
Contact Resistance: 1000Megohms/Min.
Insulator Resistance: 500V AC
Dielectric Withstanding: -40℃~+105℃
Operating Temperature: PA6T+30%GF, UL94V-0, Black
Plastic Material: Brass
Contact Material: Gold Flash Plated
Finish:

Ordering information

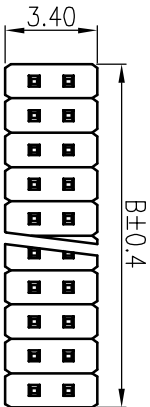

PIN	A	B
2	1.27	2.54
3	2.54	3.81
4	3.81	5.08
5	5.08	6.35
6	6.35	7.62
7	7.62	8.89
8	8.89	10.16
9	10.16	11.43
10	11.43	12.70
11	12.70	13.97
12	13.97	15.24
13	15.24	16.51
14	16.51	17.78
15	17.78	19.05
16	19.05	20.32
17	20.32	21.59
18	21.59	22.86
19	22.86	24.13
20	24.13	25.40
21	25.40	26.67
22	26.67	27.94
23	27.94	29.21
24	29.21	30.48
25	30.48	31.75
26	31.75	33.02
27	33.02	34.29
28	34.29	35.56
29	35.56	36.83
30	36.83	38.10
31	38.10	39.37
32	39.37	40.64
33	40.64	41.91
34	41.91	43.18
35	43.18	44.45
36	44.45	45.72
37	45.72	46.99
38	46.99	48.26
39	48.26	49.53
40	49.53	50.80
41	50.80	52.07
42	52.07	53.34
43	53.34	54.61
44	54.61	55.88
45	55.88	57.15
46	57.15	58.42
47	58.42	59.69
48	59.69	60.96
49	60.96	62.23
50	62.23	63.50

TOLERANCE UNSPECIFIED:		DRAWN BY: 楊熊		DATE: 4-22-09		TITLE: 成品規格圖	
X	±0.50	DISNT 東莞得升機械電子有限公司		CHECKED BY: 何智权		DATE: 4-22-09	
XX	±0.25	DISVT MECHANICAL ELECTRONIC CO.,LTD		DATE: 4-22-09		PART NO. 1-1085XXSG-030020B	
XXX	±0.15			DATE: 4-22-09		MOLD NO.	
XXXX	±0.05			DATE: 4-22-09		DRAW NO. A-1-1085XXSG-030020B	
X*	±2			DATE: 4-22-09		SHEET 1 OF 1	
X,X	±1			DATE: 4-22-09			
PROJECTION:		APPROVED BY: 陈尔洲		DATE: 4-22-09			
UNIT: mm [inch]		SCALE:1:1		SIZE: A4			