
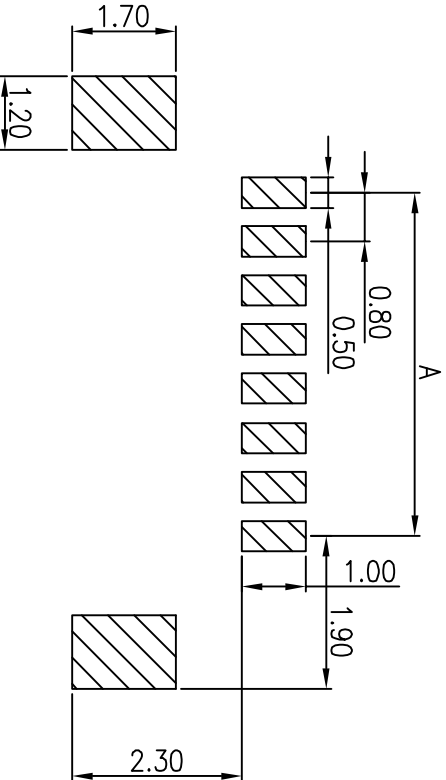

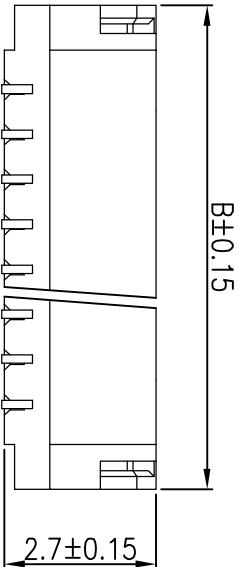
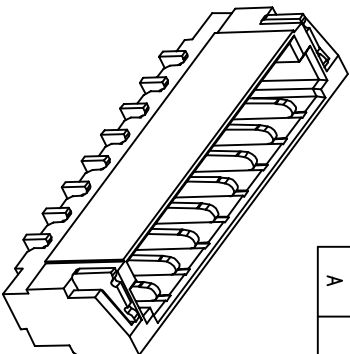


pin	A	B	C
2	0.80	3.80	1.9
3	1.60	4.60	2.7
4	2.40	5.40	3.5
5	3.20	6.20	4.3
6	4.00	7.00	5.1
7	4.80	7.80	5.9
8	5.60	8.60	6.7
9	6.40	9.40	7.5
10	7.20	10.20	8.3
11	8.00	11.00	9.1
12	8.80	11.80	9.9
13	9.60	12.60	10.7
14	10.40	13.40	11.5
15	11.20	14.20	12.3
16	12.00	15.00	13.1

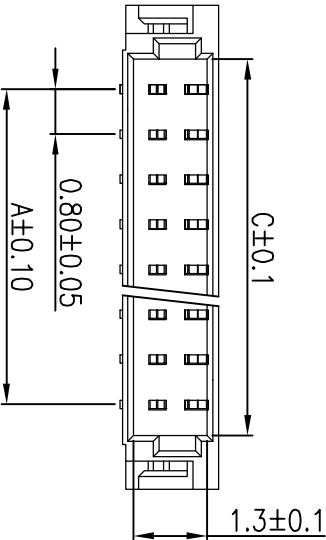

REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				09-2-11	

Specification

Rated Voltage: 30V AC/DC
Rated Current: 0.5A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 100Megohms/Min.
Dielectric Withstanding: 200V AC
Operating Temperature: -25°C~+85°C
Plastic Material: LCP, UL94V-0, Phosphor Bronze
Contact Material: Tin Plated
Finish:

Ordering information

1-5038 XX M R WT-C
C: LCP 无卤材料
R: 90度 卧式
M: SMT
XX: 02-16P
5038: 0.8 Wafer 90°
1: 成品

P.C.B LAYOUT

TOLERANCE UNSPECIFIED: X. ±0.50 X.X ±0.25 X.XX ±0.15 X.XXX ±0.10 X.XXX ±0.05 X.X' ±2° X.X' ±1°		DRAWN BY: 陈雄军 DATE: 09-12-17 TITLE: 成品规格图	
PROJECTION: 		CHECKED BY: 何智权 DATE: 09-12-17 PART NAME: 0.8mm Wafer	
UNIT: mm [inch] SCALE: 1:1 SIZE: A4		APPROVED BY: 邱华棠 DATE: 09-12-17 PART NO.: 1-5038XXMRWT-C MOLD NO.: DRAW NO.: A-1-5038XXMRWT-C SHEET: 1 OF 1	