


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	06'-08-30	

Specification

Rated Voltage: 100V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 500V AC
Operating Temperature: -40°C~+105°C
Plastic Material: PA6T,UL94V-0,Black
Contact Material: Copper Alloy
Finish: Gold Flash all over

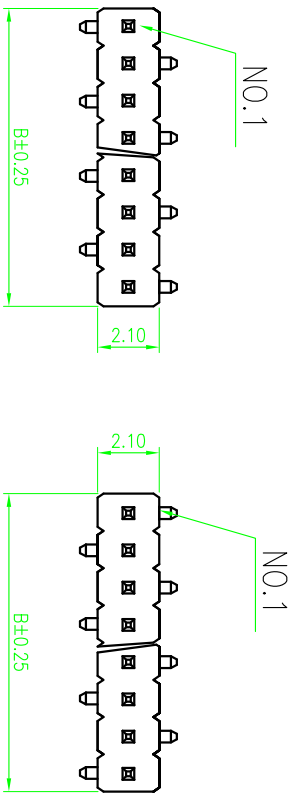


B TYPE





A TYPE

Ordering information

DSX- 101 5 XX M G-030035B-T1

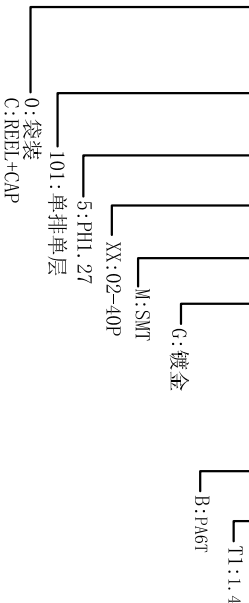

pin	A	B
2	1.27	2.54
3	2.54	3.81
4	3.81	5.08
5	5.08	6.35
6	6.35	7.62
7	7.62	8.89
8	8.89	10.16
9	10.16	11.43
10	11.43	12.7
11	12.7	13.97
12	13.97	15.24
13	15.24	16.51
14	16.51	17.78
15	17.78	19.05
16	19.05	20.32
17	20.32	21.59
18	21.59	22.86
19	22.86	24.13
20	24.13	25.4
21	25.4	26.67
22	26.67	27.94
23	27.94	29.21
24	29.21	30.48
25	30.48	31.75
26	31.75	33.02
27	33.02	34.29
28	34.29	35.56
29	35.56	36.83
30	36.83	38.1
31	38.1	39.37
32	39.37	40.64
33	40.64	41.91
34	41.91	43.18
35	43.18	44.45
36	44.45	45.72
37	45.72	46.99
38	46.99	48.26
39	48.26	49.53
40	49.53	50.8

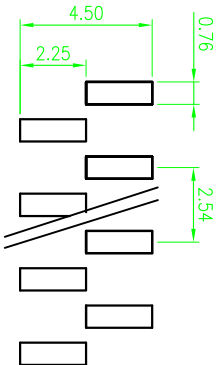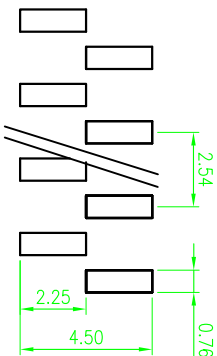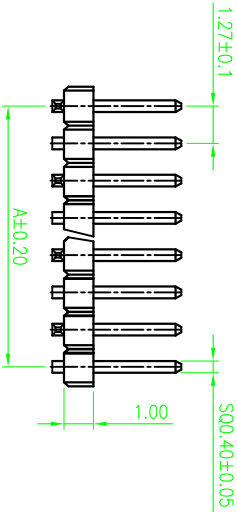

PCB Layout

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1015XX-010B	1.27mm 塑膠 1XNP, 塑膠高 1.0(PA6T)	1PCS
2	5-0040X05B-G	0.4四方鍍金針, 長 5.8	NPCS

TOLERANCE UNSPECIFIED:	
X	±0.50
X.X	±0.25
X.XX	±0.10
X.XXX	±0.05
X"	±2"
X.X"	±1"

DRAWN BY: 阮志龙		DATE: 2018-10-15	TITLE: 成品規格圖	
CHECKED BY: 阮志龙		DATE: 2018-10-15	PART NAME: 1.27mm Pin Header	
APPROVED BY: 邱台安		DATE: 2018-10-15	PART NO. DSX-1015XXMG-018035B-T1	
UNIT: mm [inch]			MOLD NO.	
SCALE: 1:1			DRAW NO.	DSX-1015XXMG-018035B-T1
SIZE: A4			SHEET	1 OF 1