


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A				08-10-22	

Specification



Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 5000Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -40C~+105C
Plastic Material: PBT+30%GF,UL94V-0,Black
Contact Material: Brass
Finish: Gold Flash Plated

Ordering information

1-401 2 XX S G S-D

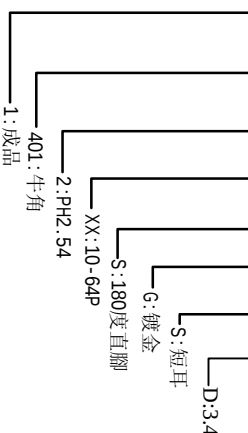

pin /ROW	A	B
2x05	10.16	32
2x06	12.70	34.54
2x07	15.24	37.08
2x08	17.78	39.62
2x10	22.86	44.7
2x12	27.94	49.78
2x13	30.48	52.32
2x15	35.56	57.4
2x17	40.64	62.48
2x20	48.26	70.1
2x25	60.96	82.8
2x30	73.66	95.5
2x32	78.74	100.58

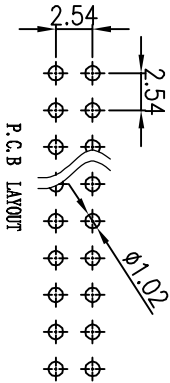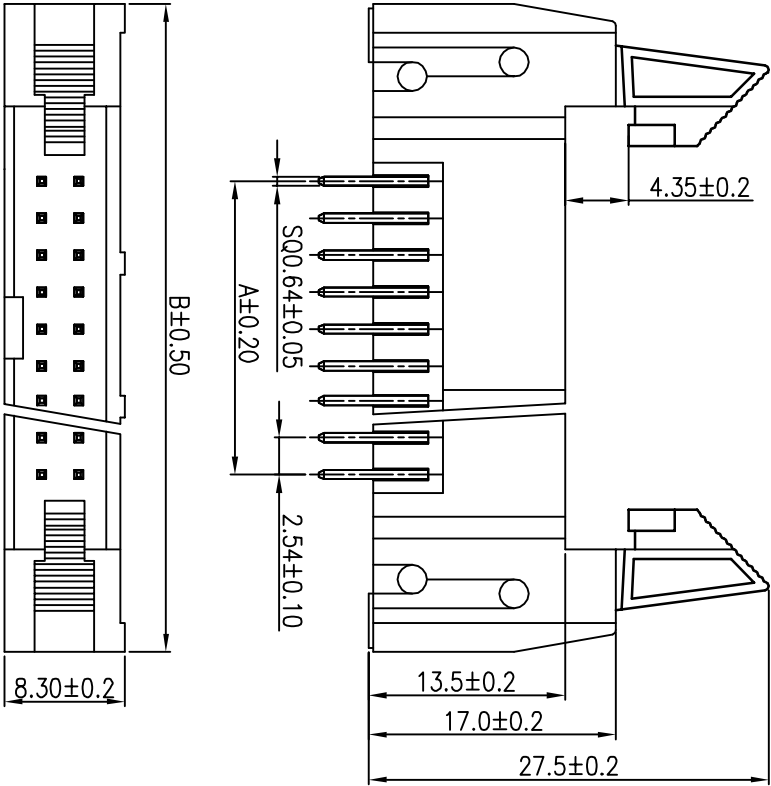

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-4012XX	2.54mm牛角塑膠2XNP,塑膠高17.0	1PCS
1	2-4012ES	牛角短耳耳扣	2PCS
2	5-0064x160S-G	0.64四方鍍金針,180度長16.0	NPCS

TOLERANCE UNSPECIFIED:		DRAINED BY: 陈雄军		DATE: 10-1-22		TITLE: 成品规格圖	
X	±0.50	DISMT 東莞得升機械電子有限公司		PART NAME: 2.54mm Shrouded Header		PART NO. 1-4012XXSGS-034	
XX	±0.25	DISMT MECHANICAL ELECTRONIC CO.,LTD		DATE: 10-1-22		MOLD NO.	
XXX	±0.15	DISMT		CHECKED BY: 何智权		DRAW NO. A-1-4012XXSGS-034	
XXX	±0.05	DISMT		DATE: 10-1-22		SHEET 1 OF 1	
X.X	±2	DISMT		APPROVED BY: 邱华棠			
X.X	±1	DISMT		UNIT: mm [inch]			
PROJECTION:		SCALE:1:1		SIZE: A4			