


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-04-15	


Specification

Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 5000Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -40°C~+105°C
Plastic Material: PBT+ $\pm$ 30GF,UL94V-0,Black
Contact Material: Brass
Finish: Gold flash Plated

Ordering information

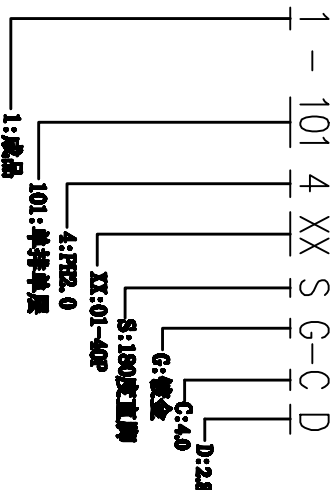

pin	A	B
2	2.00	4.00
3	4.00	6.00
4	6.00	8.00
5	8.00	10.00
6	10.00	12.00
7	12.00	14.00
8	14.00	16.00
9	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00

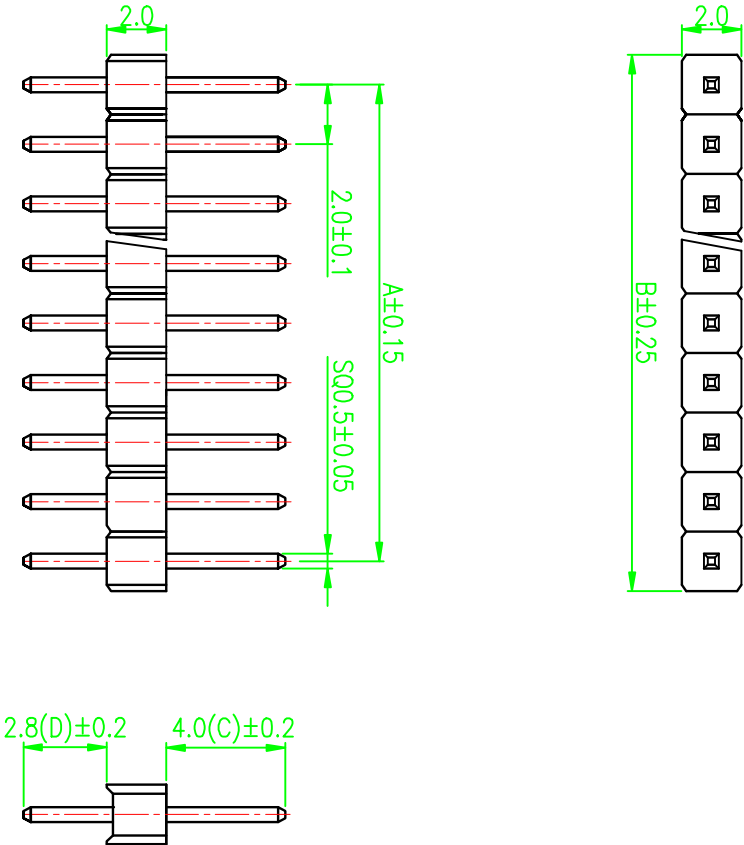

P.C.B LAYOUT

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1014XX-020	2.0mm间距SMT, 2.0mm间距, 180度直脚, 100%长, 100%宽	1PCS
2	5-0050X0885-G	0.5mm间距, 100%长, 100%宽	NPCS

TOLERANCE UNSPECIFIED:	
X	± 0.50
XX	± 0.25
XXX	± 0.10
XXXX	± 0.05
X.X	± 2
X.X	± 1

PROJECTION:	CHECKED BY:	DATE:	TITLE:
			成品测试图

UNIT:	mm [inch]	APPROVED BY:	PART NO.	MOLD NO.	DRAW NO.	SHEET
SCALE:1:1	SIZE: A4		1-1014XXSG-040028	1-1014XXSG-040028	A-1-1014XXSG-040028	1 OF 1

東莞得升電子機械有限公司
DONGGUAN DESHENG ELECTRONIC CO., LTD