
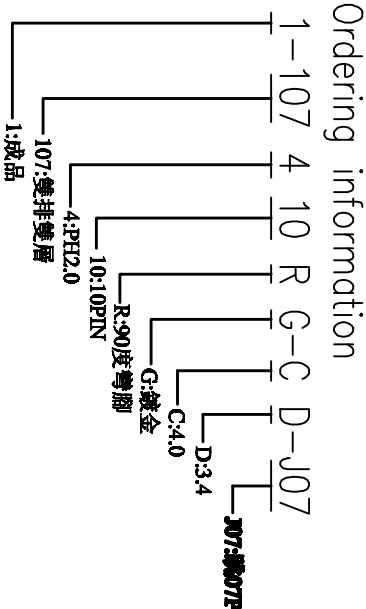
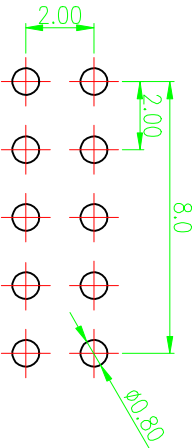
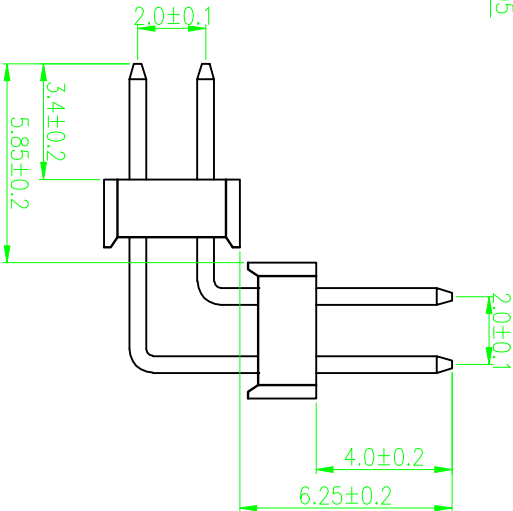


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			蘇國林	07-02-01	SCR

Specification

Rated Voltage: 125V AC/DC
Rated Current: 2A AC/DC
Contact Resistance: 30mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -40°C~+105°C
Plastic Material: PBT+¥306F, UL94V-0, Black
Contact Material: Brass
Finish: Gold Flash Plated

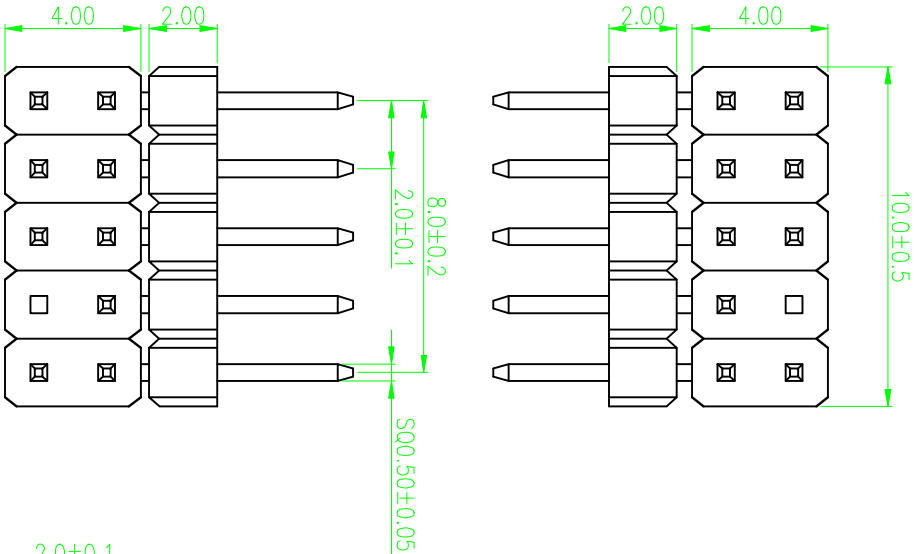

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-102410-020	2.0mm 雙掛雙層 107:鍍金 2.0	2PCS
2	5-0050x138R-G	0.5四方鍍金針,長13.8	5PCS
3	5-0050x178R-G	0.5四方鍍金針,長17.8	4PCS

TOLERANCE UNSPECIFIED: X. ±0.50 XX ±0.25 XXX ±0.10 XXXX ±0.05 X.X ±1 X.X ±2		DRAWN BY : DATE :		TITLE: 成品插繪圖	
PROJECTION: 		CHECKED BY: DATE :		PART NAME: 2.0mm Pin Header	
UNIT: mm [inch]		APPROVED BY:		MOLD NO.	
SCALE:1:1		DATE :		DRAW NO. A-1-107410RG-040034-107	
				SHEET 1 OF 1	

DISIT 東莞得升機械電子有限公司
DONGGUAN DE SHENG MECHANICAL ELECTRONIC CO.,LTD