

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A				09-9-10	




Specification

Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 5000Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -40℃~+105℃
Plastic Material: PBT+30GF, UL94V-0, Black
Contact Material: Brass
Finish: Gold Flash Plated

Ordering information

1 - 107 4 XX S G-C D
1:成品
107: 双排双翼
4: 107 2.0
S: 180度直脚
G: 镀金
C: 2.0
D: 3.9

pin /row	A	B
2x2	2.00	4.00
2x3	4.00	6.00
2x4	6.00	8.00
2x5	8.00	10.00
2x6	10.00	12.00
2x7	12.00	14.00
2x8	14.00	16.00
2x9	16.00	18.00
2x10	18.00	20.00
2x11	20.00	22.00
2x12	22.00	24.00
2x13	24.00	26.00
2x14	26.00	28.00
2x15	28.00	30.00
2x16	30.00	32.00
2x17	32.00	34.00
2x18	34.00	36.00
2x19	36.00	38.00
2x20	38.00	40.00
2x21	40.00	42.00
2x22	42.00	44.00
2x23	44.00	46.00
2x24	46.00	48.00
2x25	48.00	50.00
2x26	50.00	52.00
2x27	52.00	54.00
2x28	54.00	56.00
2x29	56.00	58.00
2x30	58.00	60.00
2x31	60.00	62.00
2x32	62.00	64.00
2x33	64.00	66.00
2x34	66.00	68.00
2x35	68.00	70.00
2x36	70.00	72.00
2x37	72.00	74.00
2x38	74.00	76.00
2x39	76.00	78.00
2x40	78.00	80.00

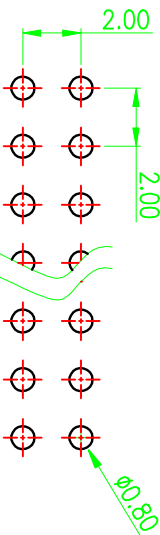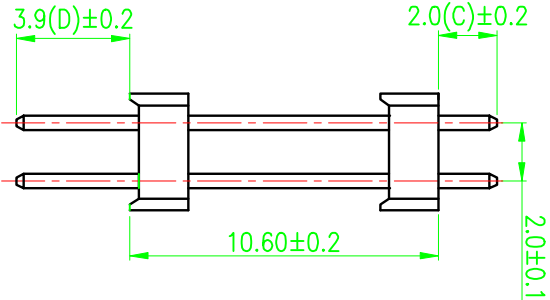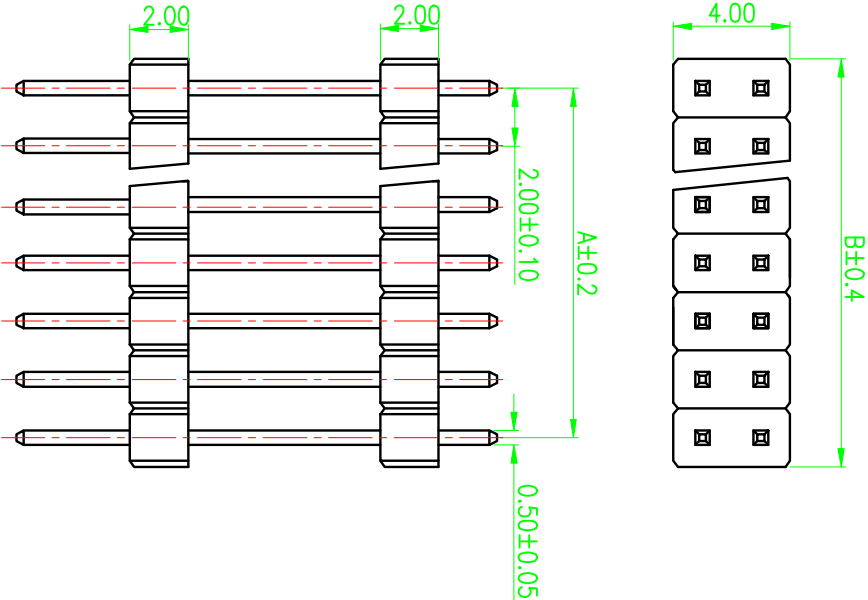

P.C.B LAYOUT

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1024XX-020	2.0mm间距24PIN材料规格	2PCS
2	5-Q050X16SS-G	0.5mm间距金针, 160°弯16S	NPCS

TOLERANCE UNSPECIFIED:	
X	±0.50
XX	±0.25
XXX	±0.15
XXXX	±0.05
X.X	±2°
X.X°	±1°

DRAWN BY: 陈雄军		DATE: 2009.9.10	
CHECKED BY: 何智权		DATE: 2009.9.10	
APPROVED BY:		DATE:	

UNIT: mm [inch]	SCALE: 1:1	SIZE: A4
-----------------	------------	----------

P.C.B LAYOUT	
P.C.B LAYOUT	

DISIT 東莞得升電子機械有限公司	
DISIT ELECTRONIC CO., LTD	
TITLE: 成品規格圖	
PART NAME: 2.0mm Pin Header	PART NO. 1-1074XXSG-020039B
MOLD NO.	DRAW NO. A-1-1074XXSG-020039B
SHEET 1 OF 1	