
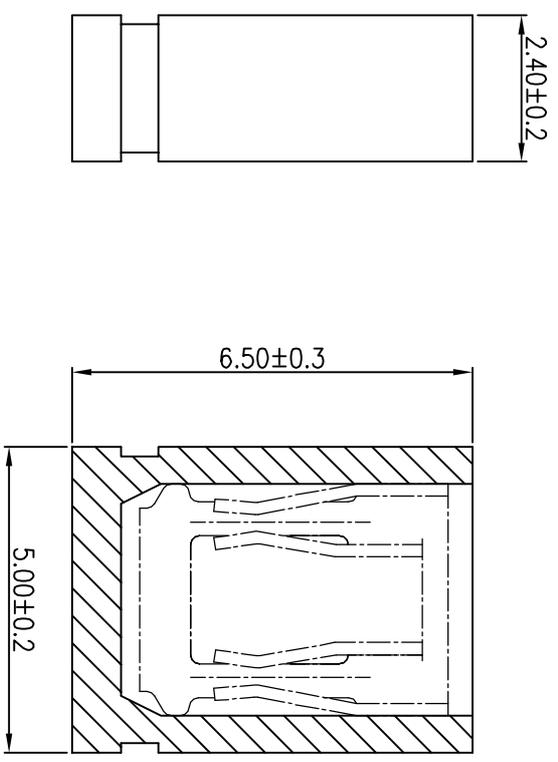




REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A				09-2-9	

### Specification

Rated Voltage: 250V AC/DC  
 Rated Current: 3A AC/DC  
 Contact Resistance: 20mohms max  
 Insulator Resistance: 1000Megohms/Min.  
 Dielectric Withstanding: 1000V AC  
 Operating Temperature: -40°C~+105°C  
 Plastic Material: PBT+30%GF, UL94V-0  
 Contact Material: Phosphor Bronze/Brass  
 Finish: Gold Flash Plated

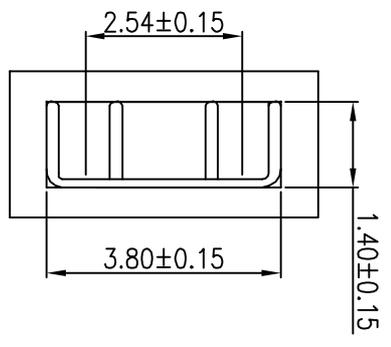

### Ordering information

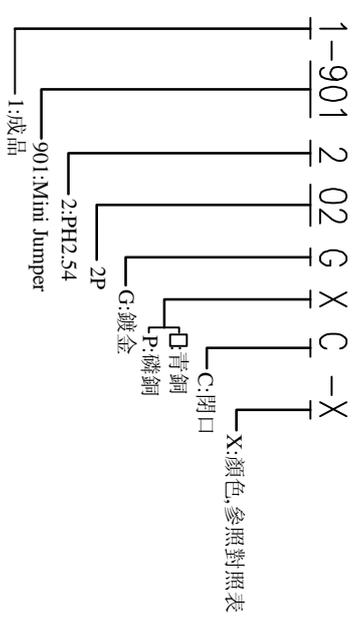

編碼	顏色
1	黑色
2	棕色
3	紅色
4	橙色
5	黃色
6	綠色
7	青色
8	藍色
9	紫色
A	灰色
	白色

<b>TOLERANCE UNSPECIFIED:</b> X: ±0.50 XX: ±0.25 XXX: ±0.15 XXXX: ±0.05 X.X: ±.2 X.XX: ±.1		<b>PROJECTION:</b> 		<b>CHECKED BY:</b> 何智权 DATE: 10-1-14	
<b>UNIT:</b> mm [inch] <b>SCALE:</b> 1:1 SIZE: A4		<b>APPROVED BY:</b> 邱华棠 DATE: 10-1-14		<b>DATE:</b> 10-1-14 <b>PART NO.:</b> 1-901202GX-C-X <b>MOLD NO.:</b> <b>DRAW NO.:</b> A-1-901202GX-C-X <b>SHEET:</b> 1 OF 1	

**DISNT** 東莞得升電子機械有限公司  
 DISINT MECHANICAL ELECTRONIC CO., LTD

**DISNT** 東莞得升電子機械有限公司  
 DISINT MECHANICAL ELECTRONIC CO., LTD