
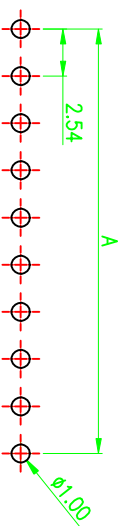
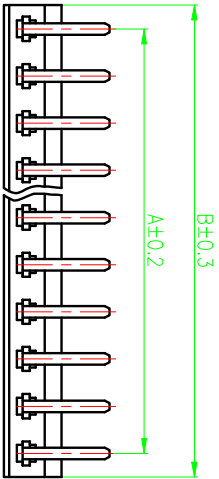
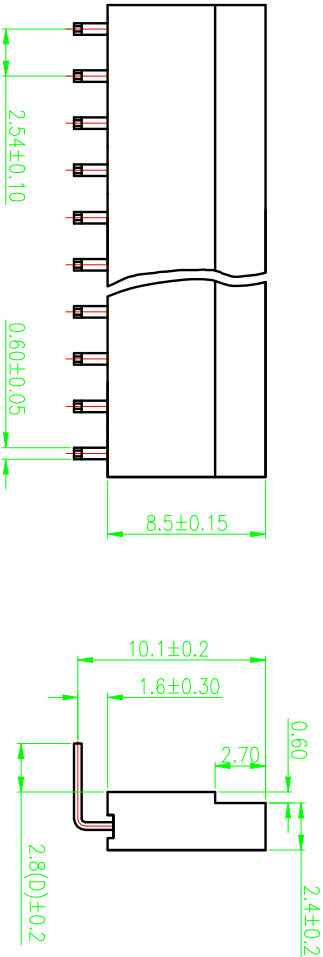


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A				08-08-25	

Specification

Rated Voltage: 250V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 250V AC
Operating Temperature: -25℃~+85℃
Plastic Material: PA9T+30%GF, UL94V-0,Black
Contact Material: Brass
Finish: Gold Flash Plated

Ordering information

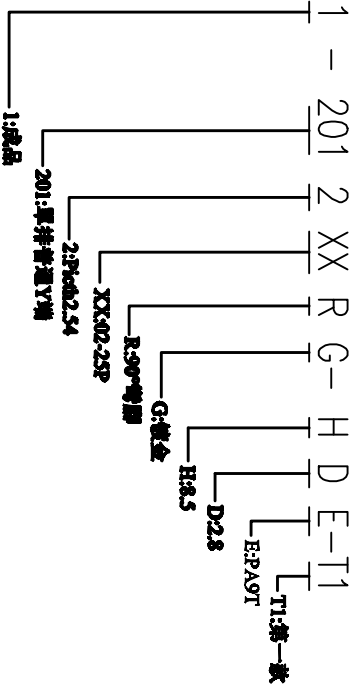

PCB LAYOUT

pin	A	B
2	2.54	5.58
3	5.08	8.12
4	7.62	10.66
5	10.16	13.20
6	12.70	15.74
7	15.24	18.28
8	17.78	20.82
9	20.32	23.36
10	22.86	25.90
11	25.40	28.44
12	27.94	30.98
13	30.48	33.52
14	33.02	36.06
15	35.56	38.60
16	38.10	41.14
17	40.64	43.68
18	43.18	46.22
19	45.72	48.76
20	48.26	51.30
21	50.80	53.84
22	53.34	56.38
23	55.88	58.92
24	58.42	61.46
25	60.96	64.00

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-2012XX-085	2.54mm间距Y插普通Y插, 2Pin, 2.54mm间距, 1.5mm间距, 1.5mm间距	1PCS
2	3-2012GA-127	2.54mm间距Y插, 2Pin, 2.54mm间距, 1.5mm间距, 1.5mm间距	NPCS

TOLERANCE UNSPECIFIED:		TITLE: 成品檢驗圖	
XX	±0.50	PART NAME: 2.54 Female Header	
XX	±0.25	PART NO. 1-2012XXRG-085028E-T1	
XXX	±0.12	MOLD NO.	
XXX	±0.05	DRAW NO.	
X.X	±7	SHEET	
X.X	±7	1 OF 1	

PROJECTION:	CHECKED BY: 何智权	DATE: 10-1-8	PART NO. 1-2012XXRG-085028E-T1
UNIT: mm [inch]	APPROVED BY: 邱华棠	DATE: 10-1-8	MOLD NO.
SCALE: 1:1	SIZE: A4	DATE: 10-1-8	DRAW NO.
		DATE: 10-1-8	SHEET