
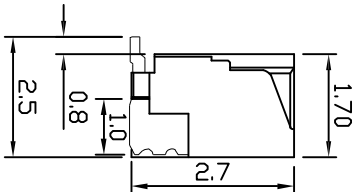
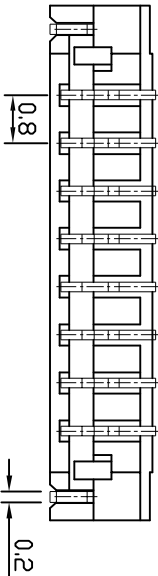
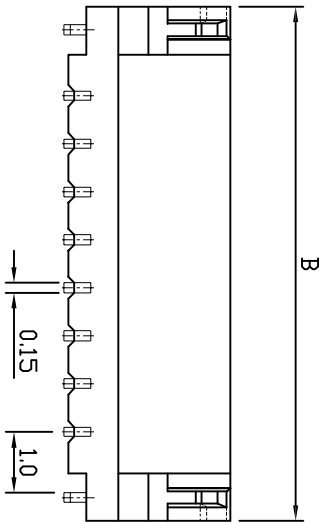
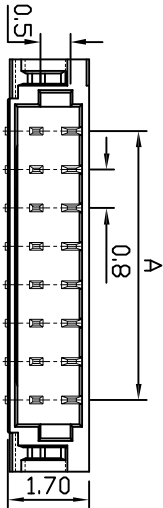


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-11-10	

Specification


Rated Voltage: 30V AC/DC
Rated Current: 0.5A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 100Megohms/Min.
Dielectric Withstanding: 200V AC
Operating Temperature: -25°C~+85°C
Plastic Material: PA6T+30%GF,UL94V-0,
Phosphor Bronze
Contact Material:
Finish: Tin Plated

Ordering information

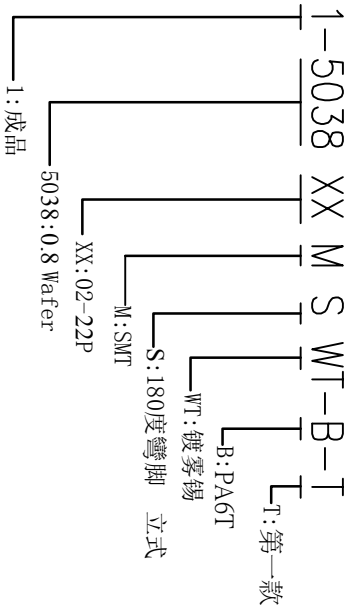

Circuits	Dim. A	Dim. B
2	0.80	3.80
3	1.60	4.60
4	2.40	5.40
5	3.20	6.20
6	4.00	7.00
7	4.80	7.80
8	5.60	8.6
9	6.40	9.40
10	7.20	10.20
12	8.80	11.80
14	10.40	13.40
15	11.20	14.20
16	12.00	15.00
17	12.80	15.80
20	15.20	18.20
22	16.80	19.80

RECOMMENDED P.C. BOARD HOLE
DIMM:
0.7±0.1

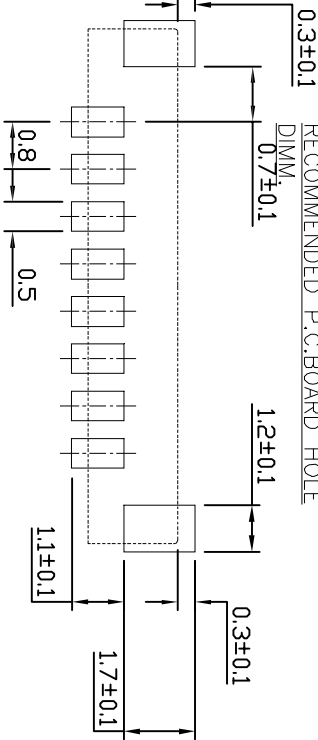

TOLERANCE UNSPECIFIED:		DRAWN BY: 阮志龙		DATE: 20130718		TITLE: 成品規格圖	
X	±0.50	CHECKED BY: 何智权		DATE: 20130718		PART NAME: 0.8mm Wafer 180D SMT	
X.X	±0.25	PROJECTION:		MOLD NO.		PART NO. 1-5038XXMSWT-B-T	
XXX	±0.15	UNIT: mm [inch]		APPROVED BY: 邱台安		DRAW NO. A-1-5038XXMSWT-B-T	
XXXX	±0.05	SCALE:1:1		DATE: 20130718		SHEET 1 OF 1	
X.X	±2	SIZE: A4					
X.X	±1						