

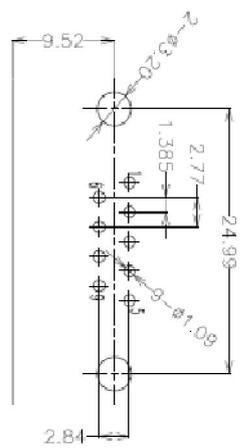
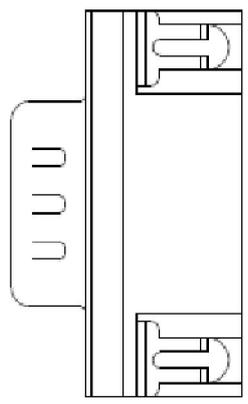


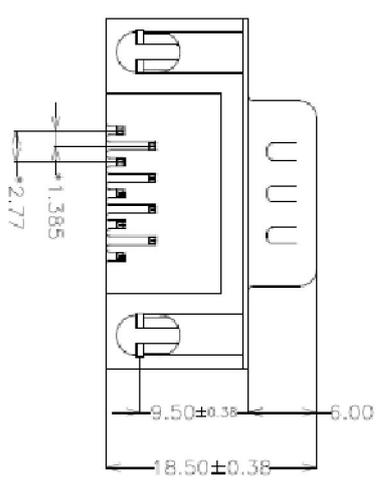


REV.	ECH. NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-09-15	

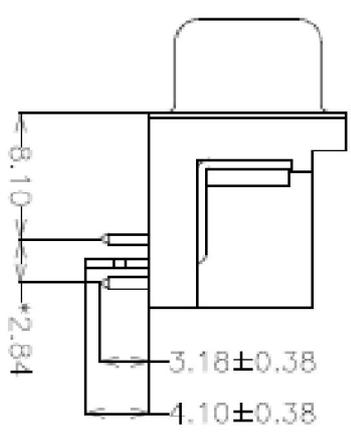

P.C.B. LAYOUT TOLERANCE ± 0.05
TOP VIEW

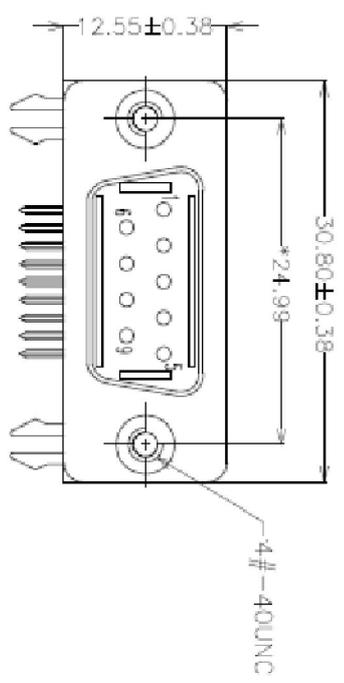

- NOTES:
- MATERIAL
 - Insulator: PBT+30%Glass Fiber (UL94V-0)
 - Contact: Brass
 - Contact Plated: Gold/TIN PLATED
 - Shell: Steel, Nickel Plated
 - Screw: Brass, Nickel Plated
 - SPECIFICATION
 - Current Rate: 1 Amps
 - Insulator Resistance: 1000MΩ Min. at 500V DC
 - Dielectric Strength: Test between adjacent contacts at 500V AC(rms) and 60 seconds hold time
 - Operation Temperature: -55C to +105C
- *: 標示是重點控制尺寸

TOLERANCE UNSPECIFIED:

- X. ±0.50
- X.X. ±0.25
- X.XX. ±0.15
- X.XXX. ±0.05
- X.X' ±2'
- X.X" ±1"



		得升電子股份有限公司 DISNT MECHANICAL ELECTRONIC CO., LTD	
DRAWN BY: 杨熊	DATE: 11-8-6	TITLE: 成品规格圖	PART NAME: DR9公端排针套系 8.1 IN.3S
CHECKED BY: 何智权	DATE: 11-8-6	PART NO.	
APPROVED BY: 陈宗渊	DATE: 11-8-6	MOLD NO.	
UNIT: mm [inch]	SCALE: 1:1	DRAW NO.	
		SHEET	1 OF 1