
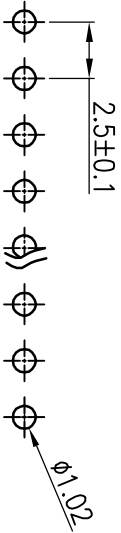
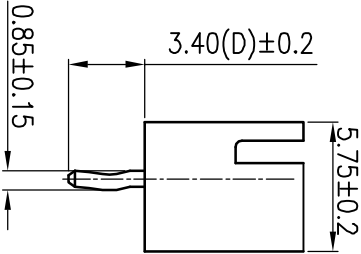
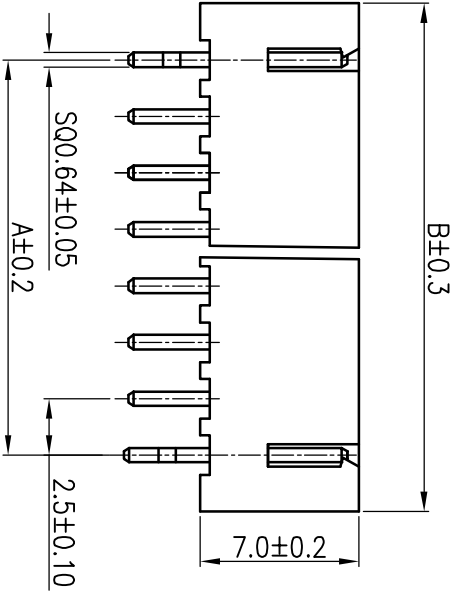
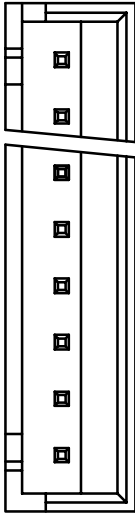


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A				08-11-18	

Specification

Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 800V AC
Operating Temperature: -25°C~+85°C
Plastic Material: PA66,UL94V-2
Contact Material: Brass
Finish: TIN Plated

Ordering information

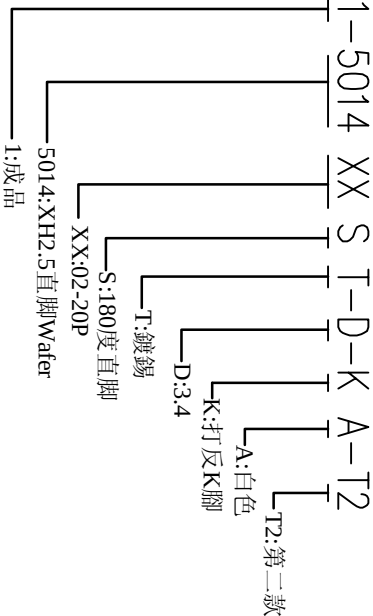

P.C.B LAYOUT

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5014XX-A	2.5mm塑膠1XNP,塑膠高7.0(PA66)	1PCS
2	5-0064x100S-T	0.64四方鍍錫針,長10.0	NPCS

TOLERANCE UNSPECIFIED: X .±0.50 X.X ±0.25 X.XX ±0.15 X.XXX ±0.05 X' ±2" X.X' ±1"		DISMT 東莞得升電子機械有限公司 DISMT MECHANICAL ELECTRONIC CO.,LTD	
DRAWN BY: 陳雄軍		DATE: 10-7-2	TITLE: 成品規格圖
CHECKED BY: 何智权		DATE: 10-7-2	PART NAME: XH2.5mm Wafer
APPROVED BY: 陈宗渊		DATE: 10-7-2	PART NO. 1-5014XXST-034-KA-T2
UNIT: mm [inch]	SCALE: 1:1	SIZE: A4	MOD NO.
DRAW NO. A-1-5014XXST-034-KA-T2		SHEET 1 OF 1	